

SOSEN LED Driver, Your Smart Choice

SS-40PA LED

: SS-40PA-54B

: 40W LED

: V03

: 2022-05-30



--	--	--	--	--	--	--	--	--



SS-40PA LED



	220Vac		240Vac	
	200Vac		264Vac	
	100Vac		264Vac	100-200Vac 48
	47Hz	50/60Hz	63Hz	
			0.25A	200Vac , 满载
(220Vac)			40A	冷机启动
			3W	220Vac/50Hz , 空载
	0.97	0.99		220Vac/50Hz , 满载
	0.94			220-240Vac/50Hz , 70-100%载
		8%	10%	220Vac/50Hz , 满载
			15%	220-240Vac/50Hz , 70-100%载




w,BS(%o 5.0V ei [P C

o™ [b0 S

™ [b S

' b0 8'rD0 xBR \$@) b0 •rD0 xBU S

0147355° 00™ [y t' pe P6 0 5.0V eb B'V eb B'S—IR""... f"90%F"s" •D@Dc•² b0™ [#•°B0™ [#•°B0™ [#•°' . Vi"•. 75 pe P6 0) Iec Iec °B0™ [sX@0Vi"•. Vi"•. 75 pe P6 0) I65€°cX



--	--	--	--	--

Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

--	--	--	--

ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017 EN 62384:2006 EN 62384:2006/A1:2009	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	

EMI/EMS	/	
---------	---	--


	EN55015:2013+A1:2015	Class B
	EN55015:2013+A1:2015	Class B
	IEC/EN 61000-3-2	Class C
	IEC/EN61000-4-5	B (模10kV , 模6kV)
	IEC/EN 61000-4-12	B (模6kV, 模6kV)



	ENEC	
	3000Vac	
EQUI	3000Vac	
	3000Vac	
	1500Vac	
EQUI	1500Vac	
EQUI	500Vac	
	10MΩ	500Vdc
	0.7mApk	240Vac

1. EMC
2. LN

EMC

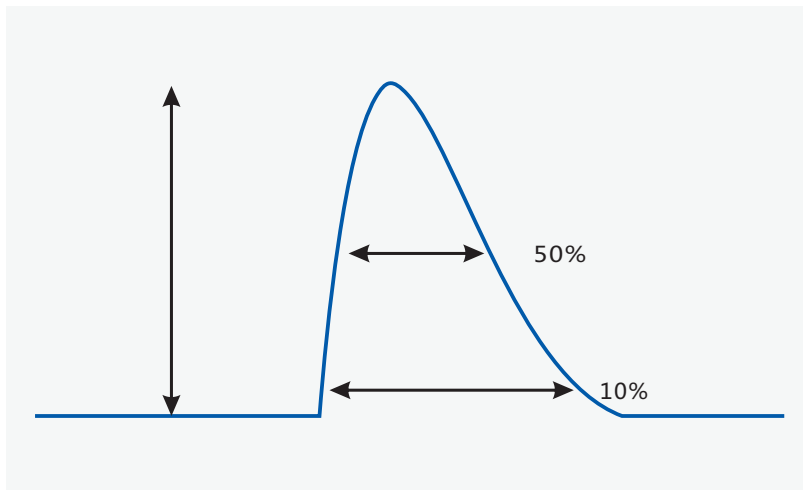

		T(@ 10%)	T(@ 50%)
220Vac	40A		300uS




SS-4

C




Vs.

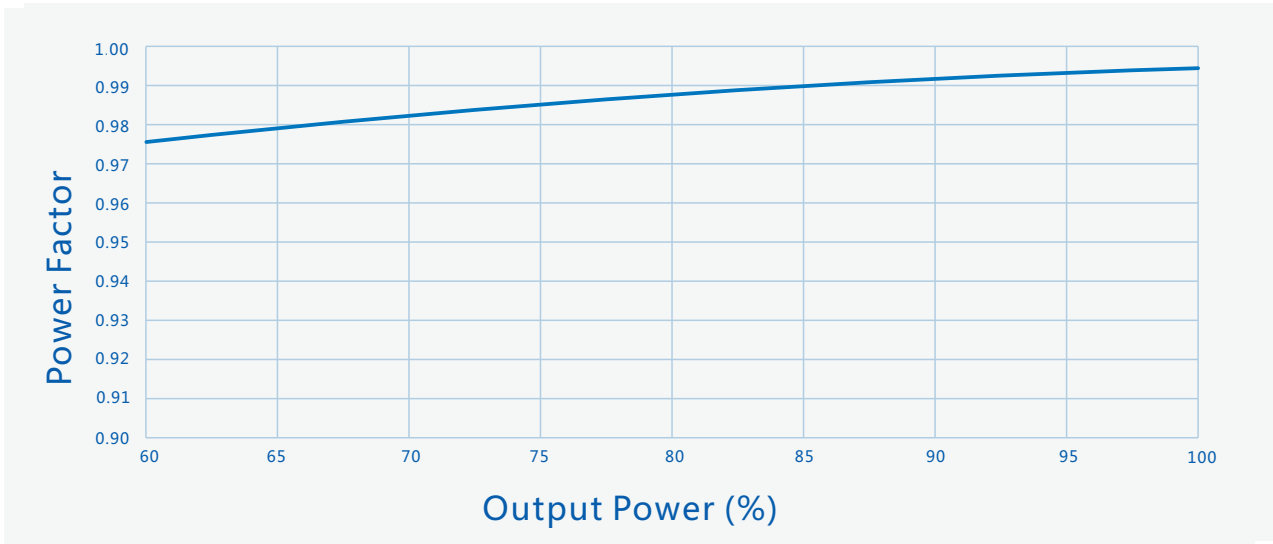

———— Vin = 220Vac


Vs.

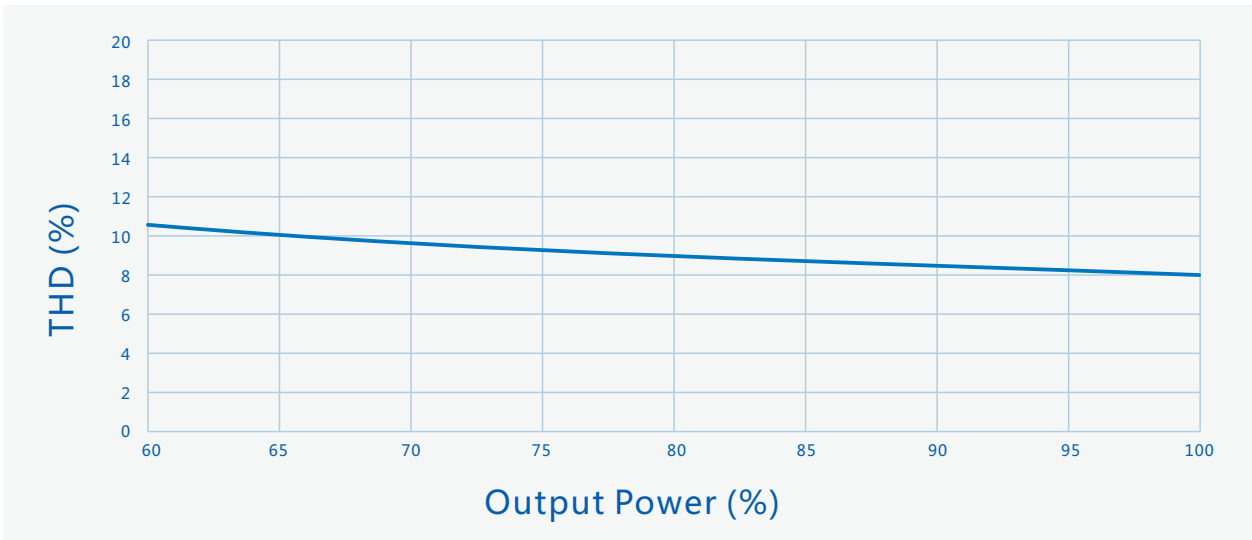


———— Vin = 220Vac



- 1
- 2
- 3 PC

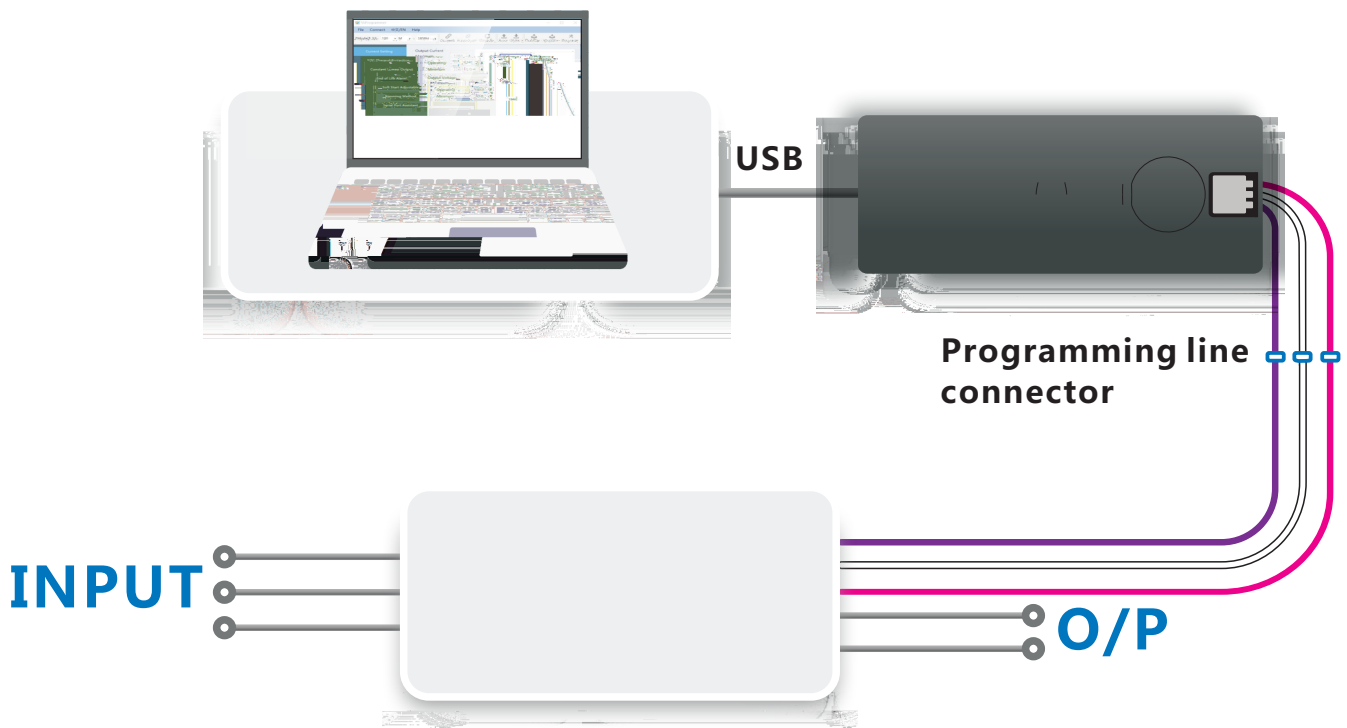





V00		2020/11/20	
V01		2021/08/30	
V02		2022/01/15	
V03		2022/05/30	

