
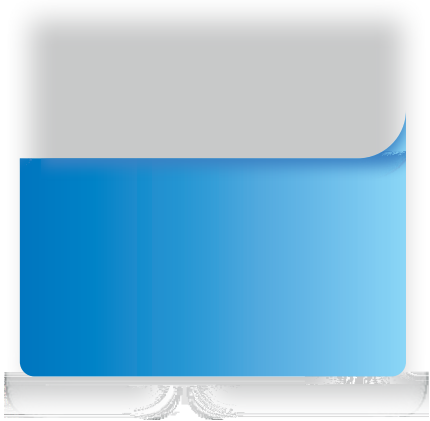


: SS-22PA-32B
: 22W LED
: V03
: 2022-05-30





--	--	--	--	--	--	--	--	--



SS-22PA LED



	220Vac		240Vac	
	200Vac		264Vac	
	100Vac		264Vac	100-200Vac 48
	47Hz	50/60Hz	63Hz	
			0.15A	200Vac , 满载
(220Vac)			40A	冷机启动
			3W	220Vac/50Hz , 空载
	0.97	0.99		220Vac/50Hz , 满载
	0.93			220-240Vac/50Hz , 70-100%载
		12%	15%	220Vac/50Hz , 满载
			20%	220-240Vac/50Hz , 70-100%载



--	--	--	--



1-10V		0V		12V	DIM+ 300-400uA
		10%Ioset		100%Ioset	DIM+/DIM-
		1V		10V	
PWM	PWM	9.8V		10.2V	DIM+ 300-400uA
	PWM	0V		0.3V	DIM+/DIM-
	PWM	1KHz		2KHz	
	PWM	10%		100%	
	70	100,000 hours			80%
	MTBF	250,000 hours			220Vac, 25 (MIL-HDBK-217F)
		IP20			
		90			
		5			70
		190g			
		123mm*79mm*31mm			x x

25

LED





Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	



ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017 EN 62384:2006 EN 62384:2006/A1:2009	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	




EMI/EMS	/	
	EN55015:2013+A1:2015	Class B
	EN55015:2013+A1:2015	Class B
	IEC/EN 61000-3-2	Class C
	IEC/EN61000-4-5	B (模10kV , 模6kV)
	IEC/EN 61000-4-12	B (模6kV, 模6kV)

	ENEC	
	3000Vac	
EQUI	3000Vac	
	3000Vac	
	1500Vac	
EQUI	1500Vac	
EQUI	500Vac	
	10MΩ	500Vdc
	0.7mApk	240Vac

1. EMC
2. LN


EMC

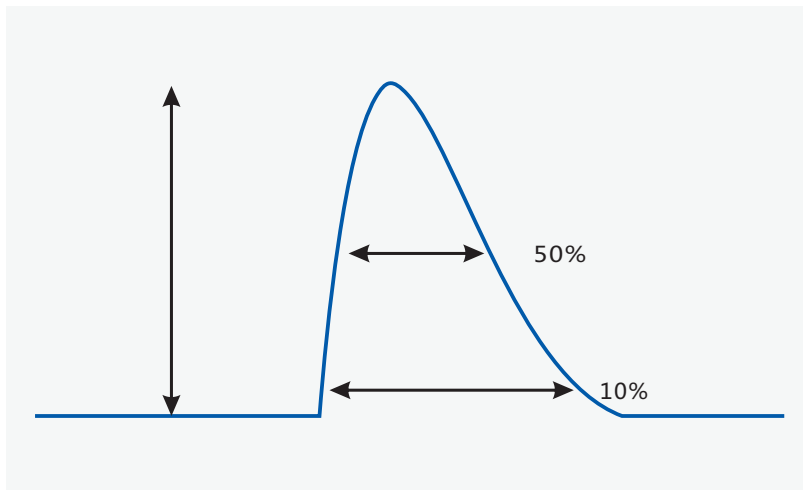

		T(@ 10%)	T(@ 50%)
220Vac	40A		300uS




Vs. (/AOC)

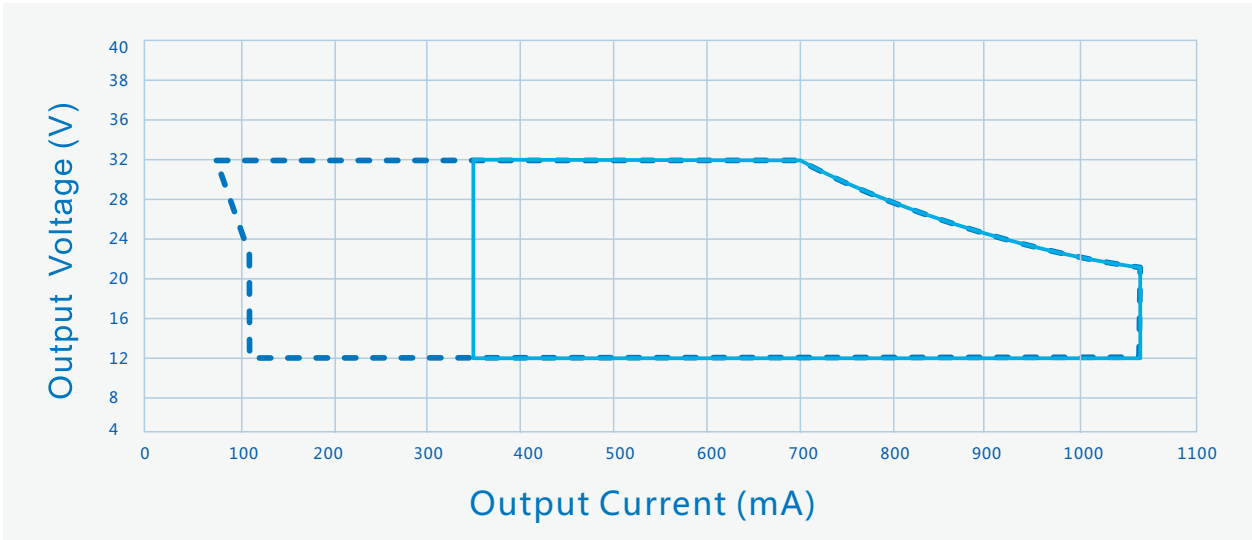

----- Dimming Window ————— AOC Window

Vs. (Vin=230Vac)

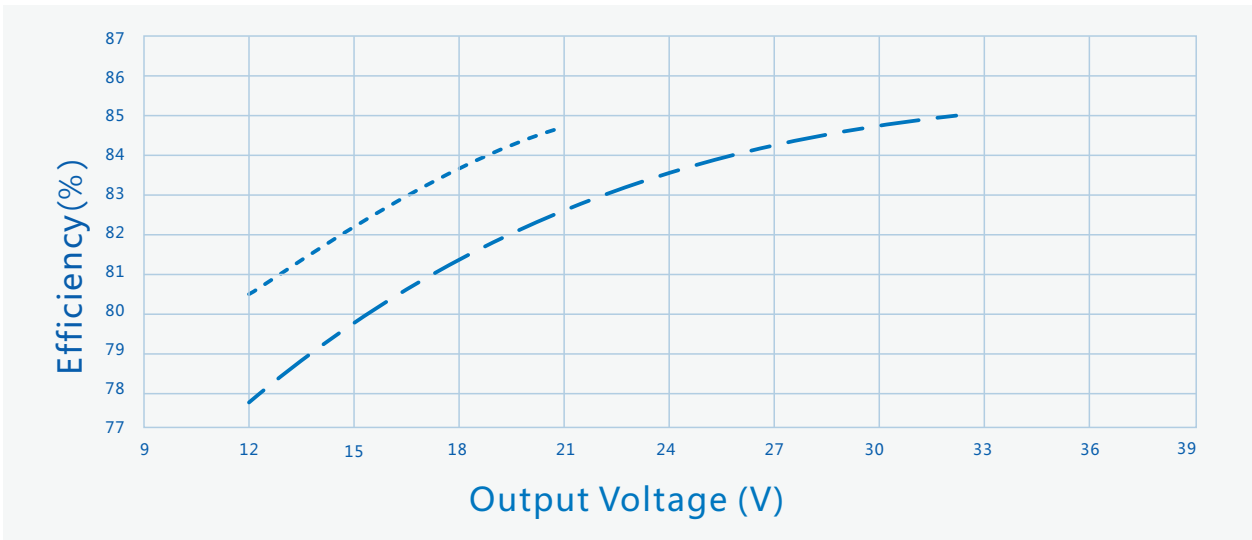


----- Io=1050mA

————— Io=700mA




Vs.

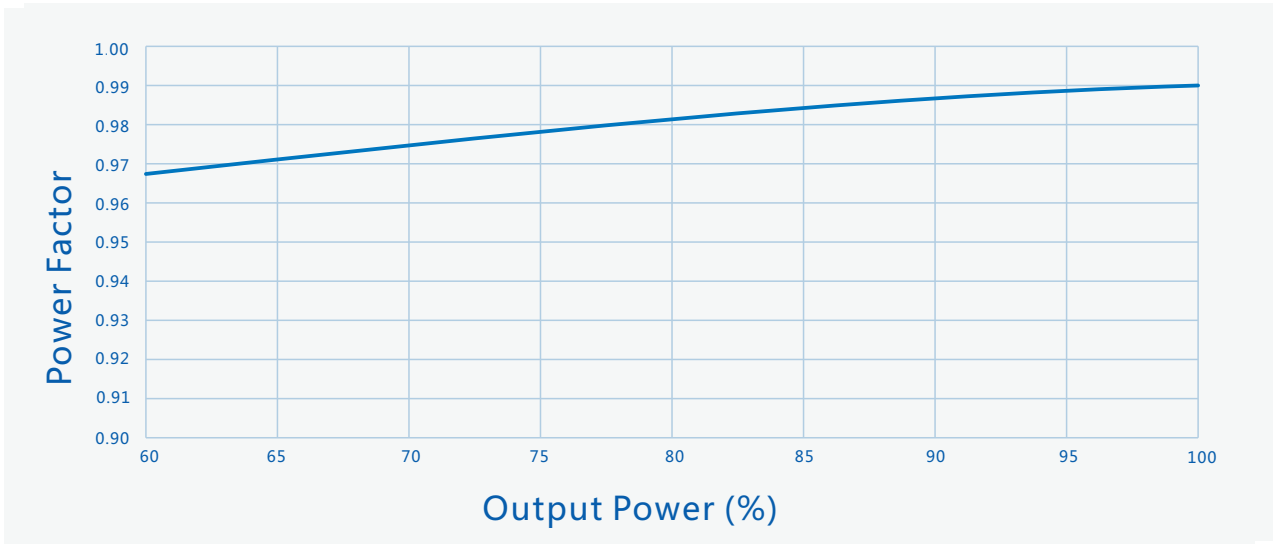

— Vin = 220Vac

Vs.

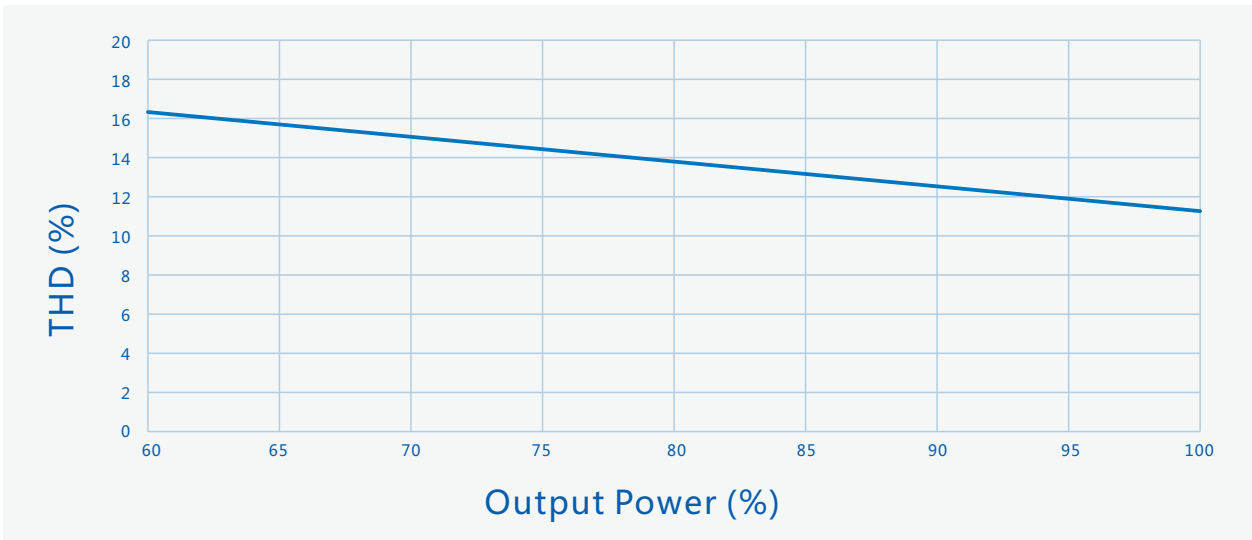


— Vin = 220Vac



Vs. (10 55)

Vs.


10

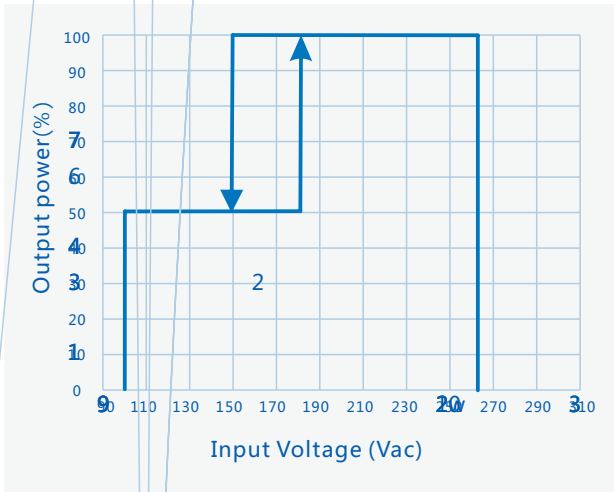


Vs.


Vs.

10 10

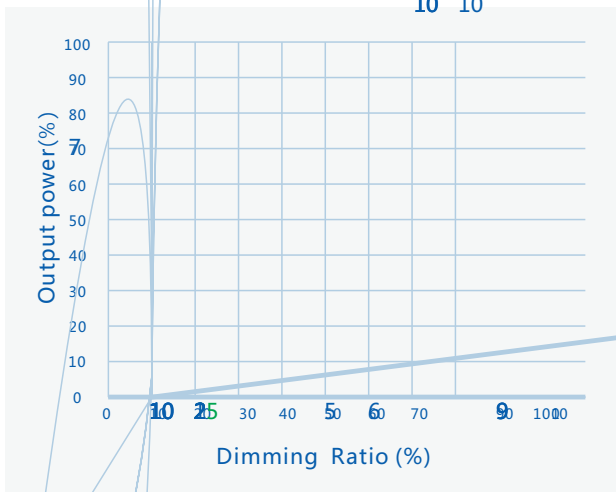

- 1
- 2
- 3 PC

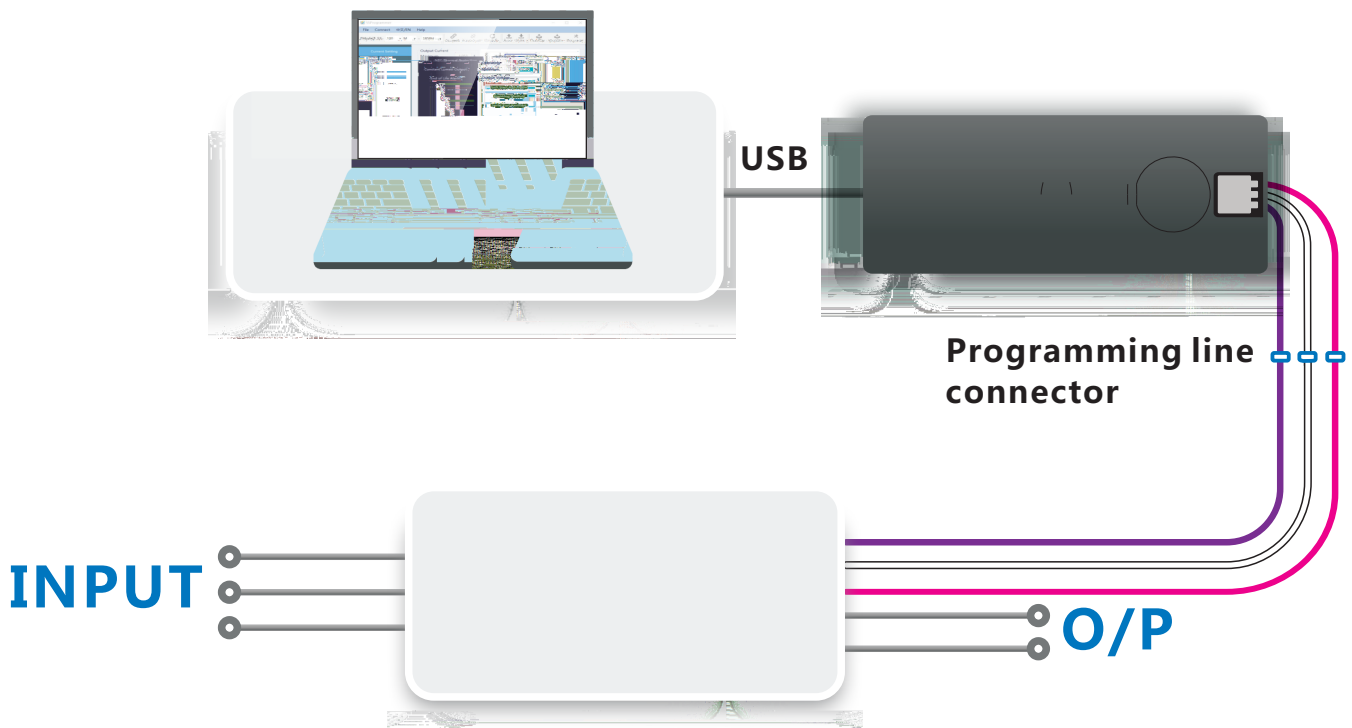





- mm) : = 4 : m





V00		2020/11/20	
V01		2021/08/30	
V02		2022/01/15	
V03		2022/05/30	

