



# Your Smart Choice

: SS-165PA-235B

: 165W LED

: V03

: 2022-05-30

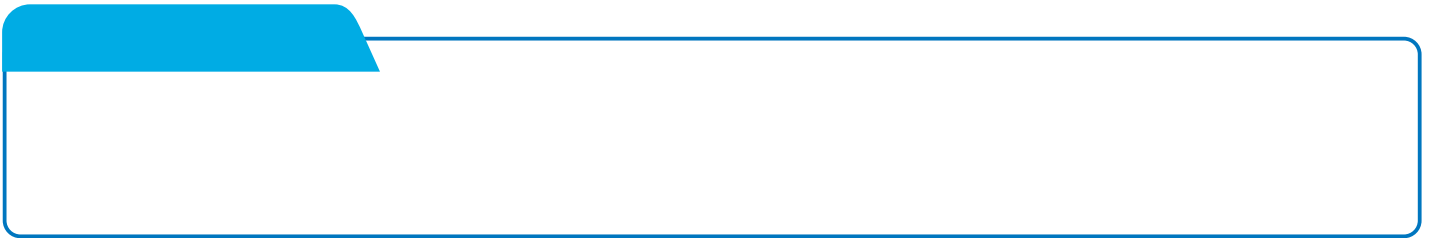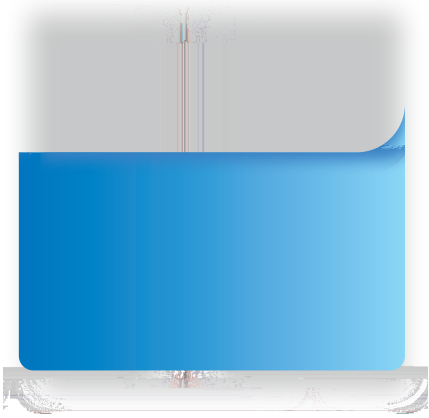

--	--	--	--	--	--	--	--	--



# SS-165PA LED



	220Vac		240Vac	
	200Vac		264Vac	
	100Vac		264Vac	100-200Vac 48
	47Hz	50/60Hz	63Hz	
			0.9A	200Vac , 满载
(220Vac)			100A	冷机启动
			5W	220Vac/50Hz , 空载
	0.96	0.98		220Vac/50Hz , 满载
	0.92			220-240Vac/50Hz , 70-100%载
		8%	10%	220Vac/50Hz , 满载
			20%	220-240Vac/50Hz , 70-100%载



# SS-165PA LED

	90V		235V	90-157V
	157V		235V	$P_o = V_o \cdot I_o = 165W$
	0.7A		1.05A	1.05A 157V, 0.7A 235V
AOC	0.35A		1.05A	
			250V	
@ 220Vac	90.0%	92.0%		235V/0.7A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			0.5S	230Vac ,
	-2%		+2%	
	-2%		+2%	
	-0.03%/		+0.03%/	0 90
	90	100	110	> Tc Typ., < Tc Min.,
			15W	



---





Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017 EN 62384:2006 EN 62384:2006/A1:2009	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	

EMI/EMS		
/		
	EN55015:2013+A1:2015	Class B
	EN55015:2013+A1:2015	Class B
	IEC/EN 61000-3-2	Class C
	IEC/EN61000-4-5	B ( 模10kV , 模6kV )
	IEC/EN 61000-4-12	B ( 6kV 6kV )





G

ryg • B CR~ ÁIB

86-755 2

ZHEN SOSEN ELECTRIC



86-755-29358800

86-7



## AC

0.2-1.5mm<sup>2</sup>,16-24AWG,WAGO250(3.5mm),Solid/Stranded Wire  
Strip length 8.5-9.5mm

## DC

0.2-1.5mm<sup>2</sup>,16-24AWG,WAGO250(3.5mm),Solid/Stranded Wire  
Strip length 8.5-9.5mm

## DIM

0.2-1.5mm<sup>2</sup>,16-24AWG,WAGO250(3.5mm),Solid/Stranded Wire  
Strip length 8.5-9.5mm

1

LED

;







V00		2021/01/15	
V01		2021/11/19	
V02		2022/01/15	
V03		2022/05/30	

