

SOSEN LED Driver, Your Smart Choice

SS-1000VP-G LED

: SS-1000VP-GXX

: 1000W LED

: V00

: 2024-12-20



SS-1000VP-G系列LED

“*”

“*”	DALI (后缀:D)	AUX 12V (:H)	NTC (:N)	Timing	0-10V/PWMDim /Resistor (:B)	
BH		✓		✓	✓	
BHN		✓	✓	✓	✓	

--	--	--	--	--	--

	200Vac		277Vac	
	180Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			7.5A	200Vac
			1150W	200Vac
			56A	
	(277Vac)		70A	
			0.5W	200Vac
	0.97		200Vac	200Hz
	0.97		200Vac	200Hz
		8%		200Hz
				200Vac 70%-100%

233号

(SS-1000VP-G56*)



SS-1000VP-G系列LED

		11.4V	12V	13.8V	
		0mA	200mA		
0-10V		0V		12V	
		10% loaset		100% loaset	DIM+ 110uA
		0V		10V	DIM+/DIM-
PWM	PWM	9.8V		10.2V	
	PWM	0V		0.3V	DIM+ 110uA
	PWM	1KHz		2KHz	DIM+/DIM-
	PWM	0%		100%	
		0Kohm		100Kohm	
		10%		100%	DIM+ 110uA
		7%	8%	9%	PWM,
		8%	9%	10%	PWM,
	75	50,000hours		80%	
	MTBF	202,300hours		220Vac, , 25	(MIL-HDBK-217F)
		IP67			
		90			
		5		75	
		2900g			
		380mm*89.5mm*44.5mm		x x	

1, 25 LED N,
 2, 0-100% , :91K /N.



SS-1000VP-G系列LED

Tcase	-40	25	+90	
	-40	25	+90	
	10% RH		90% RH	
	5% RH		95% RH	
	-65m		4000m	

UL/cUL	UL8750	✓	
ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017	✓	
UKCA	EN 61347-1:2015+A1:2021 EN 61347-2-13:2014+A1:2017 EN 62493:2015 BS EN 61347-1:2015+A1:2021 BS EN 61347-2-13:2014+A1:2017 BS EN 62493:2015	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	

EMI/EMS		/		
	EN55015:2013+A1:2015			
	EN55015:2013+A1:2015			
	IEC/EN 61000-3-2	Class C		
	IEC/EN61000-4-5	B	10kV	6kV
	ANSI/C82.77-5-2017	B	6kV	6kV
	IEC/EN 61000-4-12	B	6kV	6kV


SS-1000VP-G系列LED

:



	UL	ENEC	
	2U+1000Vac	4U+2000Vac	
	2U+1000Vac	2U+1000Vac	
	2U+1000Vac	4U+2000Vac	
	10M		500Vdc
	0.1	7.5	25A/1min
	0.75mA		277Vac

- 1. EMC LN NTC EMC
- 2. EMC LN NTC EMC

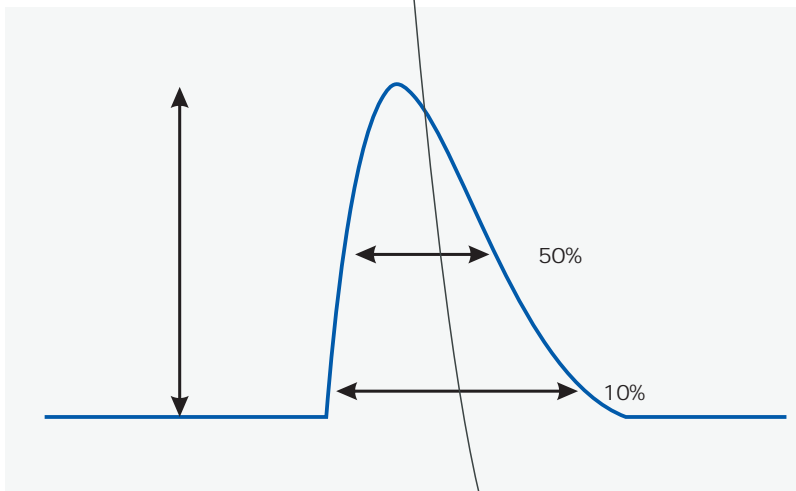

Vin		(@ 10%)	(@ 50%)
-----	--	---------	---------

220Vac	56A	11mS	4mS
277Vac	70A	12mS	4mS

6/15


233号

86-755-29358800

SS-1000VP-G系列LED

Vs.

/AOC

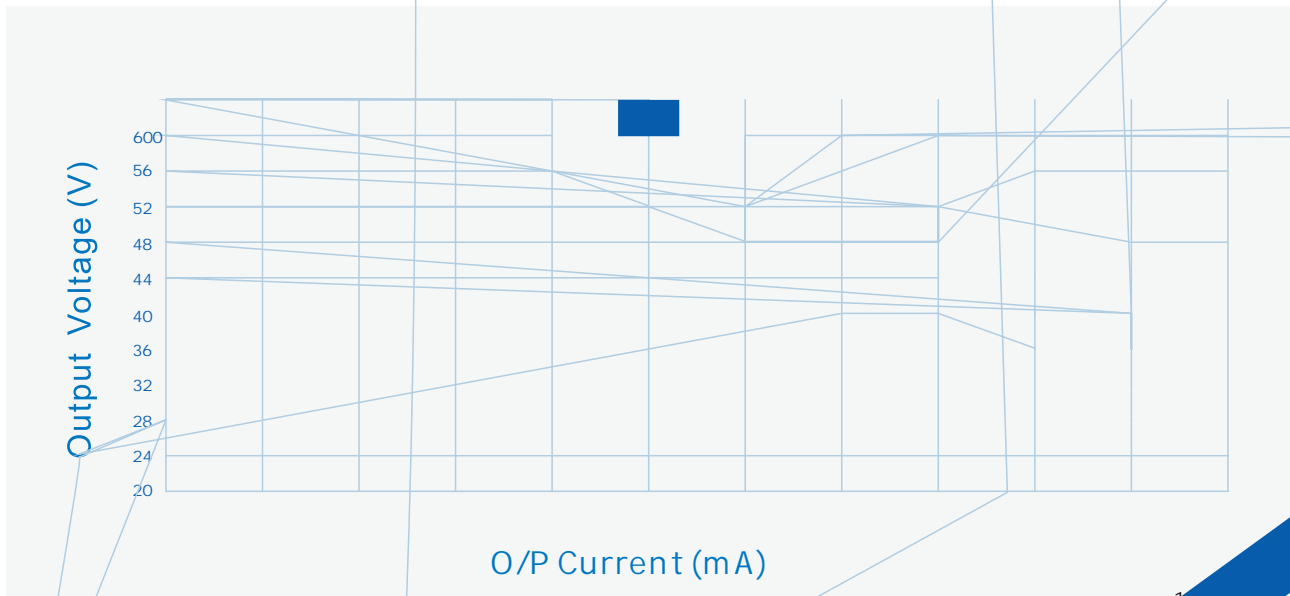


----- Dimming Window

————— AOC Window


SS-1000VP-G系列LED

(SS-1000VP-G56*)

Vs.

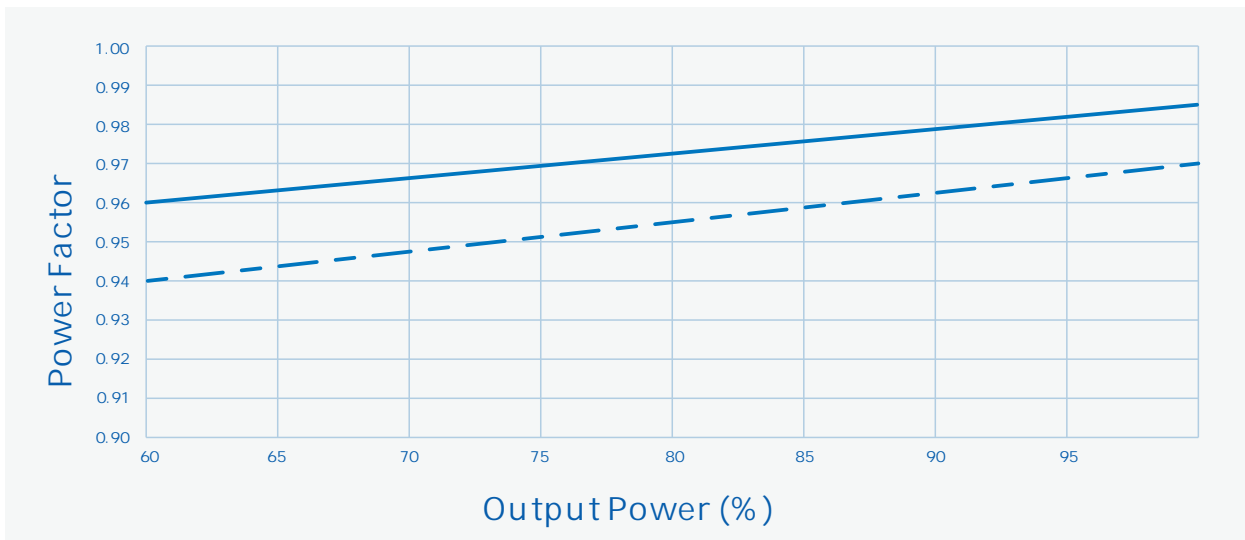


Vs.

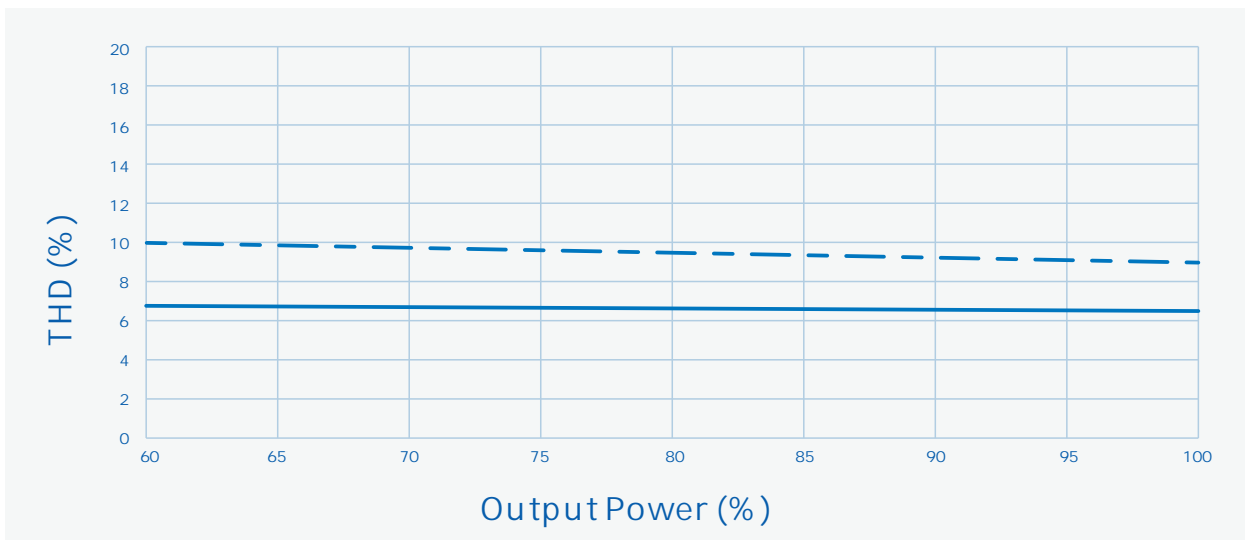

SS-1000VP-G系列LED

- 1
- 2
- 3 PC

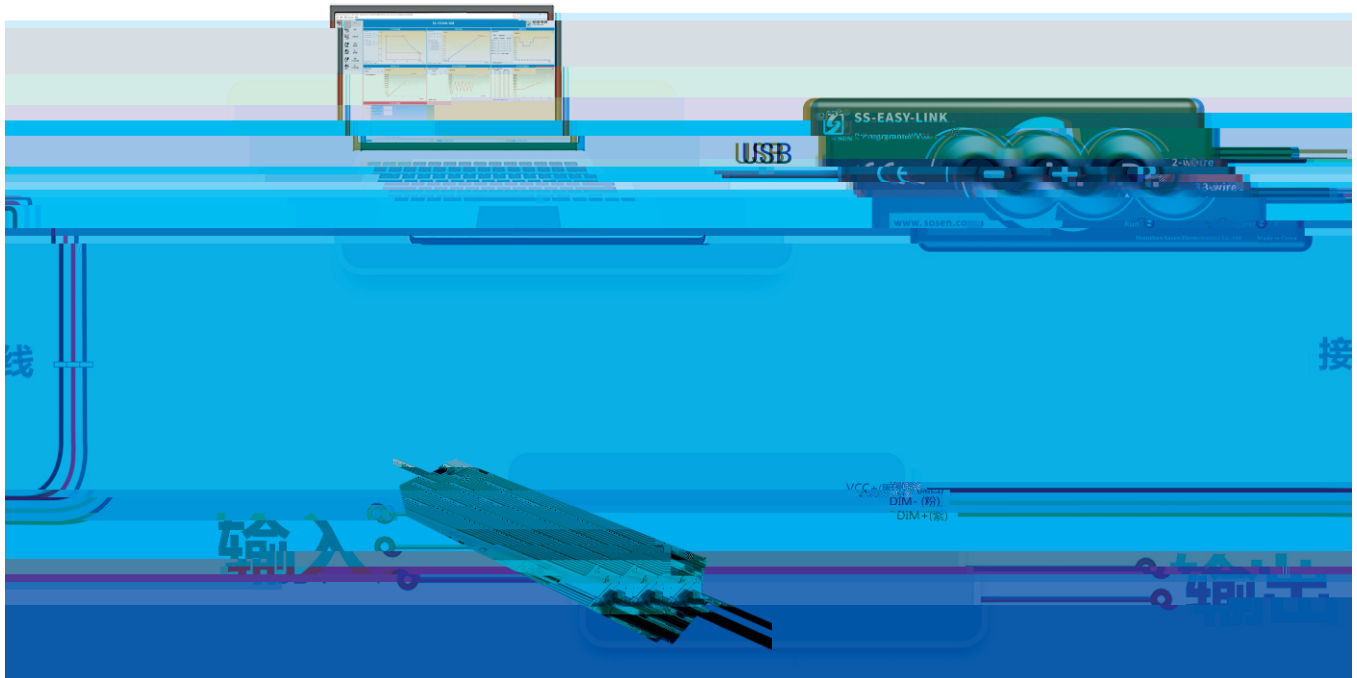

LED


LED

SS-1000VP-G系列LED

	(0-10V)	10V()	
	(10-0V)	0V()	
	(0-10V)	0V()	()
			()

“ 10V(输出电流)” / “调光电压默认0V（吸入电流）”，需要根据最终用户使用的调光器来设置





SS-1000VP-G系列LED



1

- mm × × =577× 385× 162;
- 5
- 2.9kg 16kg
-

GB 3873 83

1

RoHS

RoHS (2011/65/EU) 2015/863/EU

SS-1000VP-G系列LED



V00		2024/12/20	

