



SOSEN LED Driver, Your Smart Choice

SS-730VP-G LED

: SS-730VP-GXX

: 730WLED

: V01

: 2025-02-20



SS-730VP-G系列LED

“ * ”

“ * ”	DALI (后綴:D)	AUX 12V :H)	NTC :N)	Timing	0-10V/PWMDim /Resistor (:B)	
BH		✓		✓	✓	
BHN		✓	✓	✓	✓	



	200Vac		277Vac	
	180Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			5.5A	200Vac
			830W	200Vac
(220Vac)			56A	
(277Vac)			70A	
			0.5W	220Vac/50Hz
	0.95	0.97		220Vac/50Hz
	0.90			200-277Vac 70% -100%
		8%	10%	220Vac/50Hz
			20%	200-277Vac 70% -100%



8./h w w Ê % q 5. l q 0")

)				

SS-730VP-G系列LED

		11.4V	12V	13.8V	
		0mA	200mA		
0-10V		0V		12V	
		10% loaset		100% loaset	DIM+ 110uA
		0V		10V	DIM+/DIM-
PWM	PWM	9.8V		10.2V	
	PWM	0V		0.3V	DIM+ 110uA
	PWM	1KHz		2KHz	DIM+/DIM-
	PWM	0%		100%	
		0Kohm		100Kohm	
		10%		100%	DIM+ 110uA
		7%	8%	9%	PWM,
		8%	9%	10%	PWM,
	75	50,000hours		80%	
MTBF		201,000hours		220Vac, , 25 (MIL-HDBK-217F)	
		IP67			
		90			
		5		75	
		2500g			
		325mm*89.5mm*44.5mm		x x	

1, 25 LED N,
 2, 0-100% , :91K /N.

SS-730VP-G系列LED



Tcase	-40	25	+90		
	-40	25	+90		
	10% RH		90% RH		
	5% RH		95% RH		
	-65m		4000m		



UL/cUL	UL8750	✓	
ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017	✓	
UKCA	EN 61347-1:2015+A1:2021 EN 61347-2-13:2014+A1:2017 EN 62493:2015 BS EN 61347-1:2015+A1:2021 BS EN 61347-2-13:2014+A1:2017 BS EN 62493:2015	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	




SS-730VP-G系列LED

:



	UL	ENEC	
	2U+1000Vac	4U+2000Vac	
	2U+1000Vac	2U+1000Vac	
	2U+1000Vac	4U+2000Vac	
	10M		500Vdc
	0.1		25A/1min
	0.75mA		277Vac

1. EMC LN NTC EMC
2. LN NTC EMC

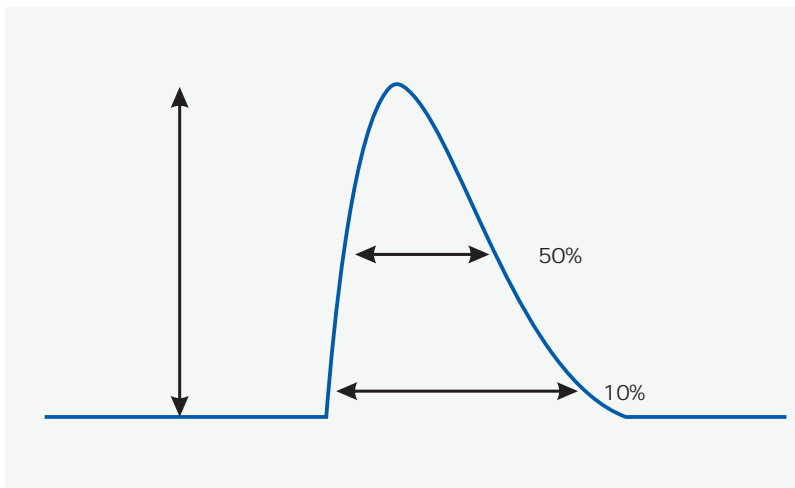

Vin		(@ 10%)	(@ 50%)
220Vac	56A	10mS	5mS
277Vac	70A	12mS	8mS

6/15




SS-730VP-G系列LED

Vs.


/AOC



SS-730VP-G系列LED

Vs. (Vin=220Vac)

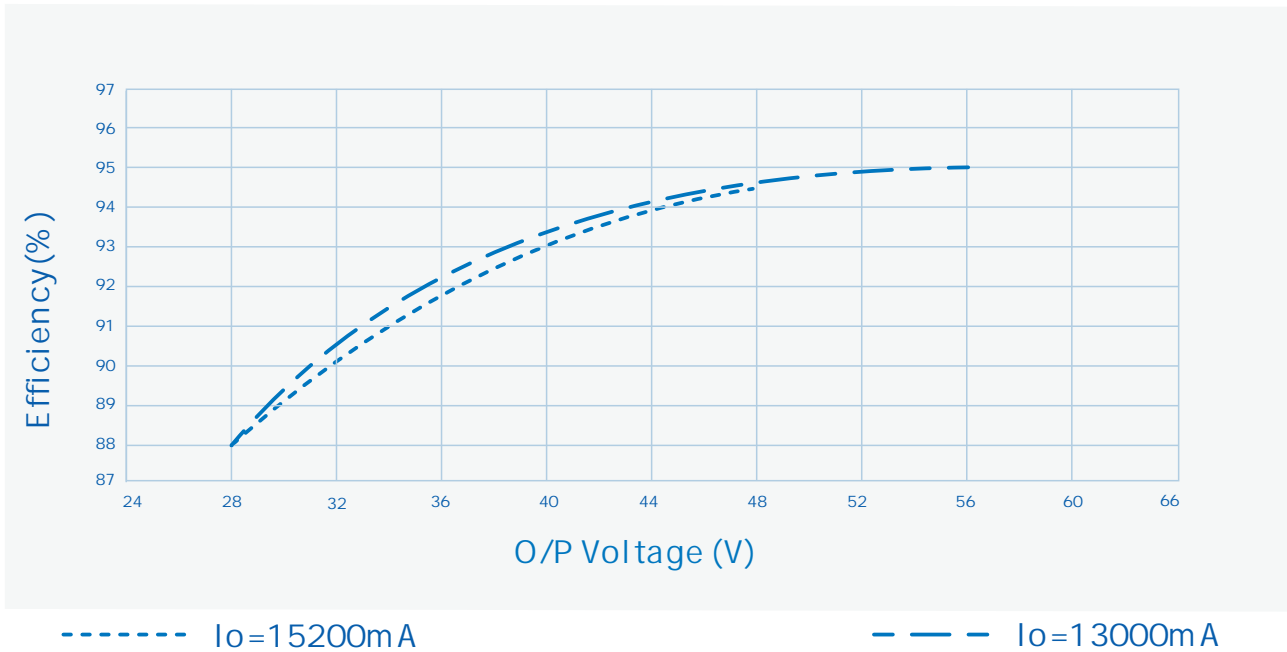


Vs. (Vin=277Vac)

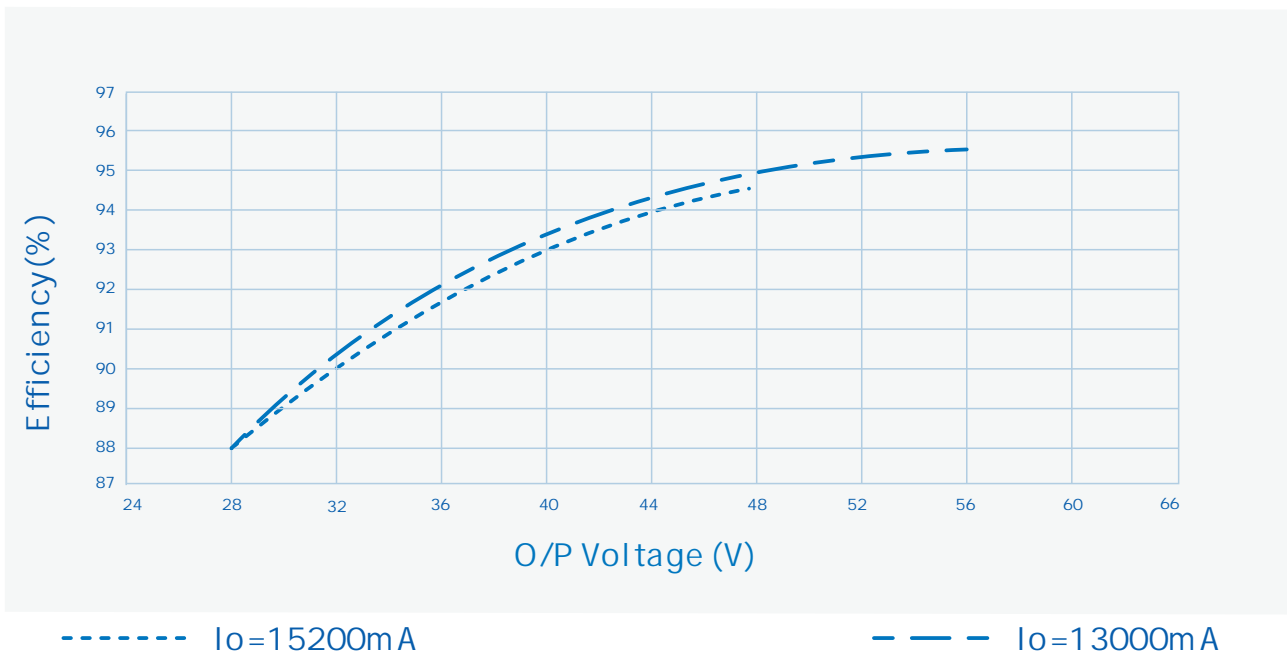

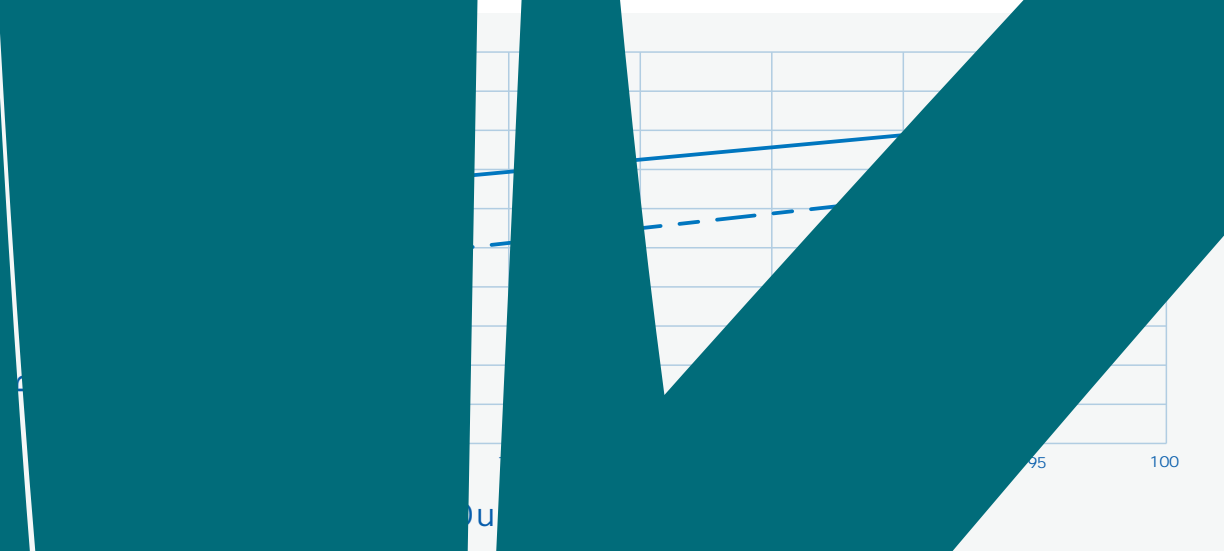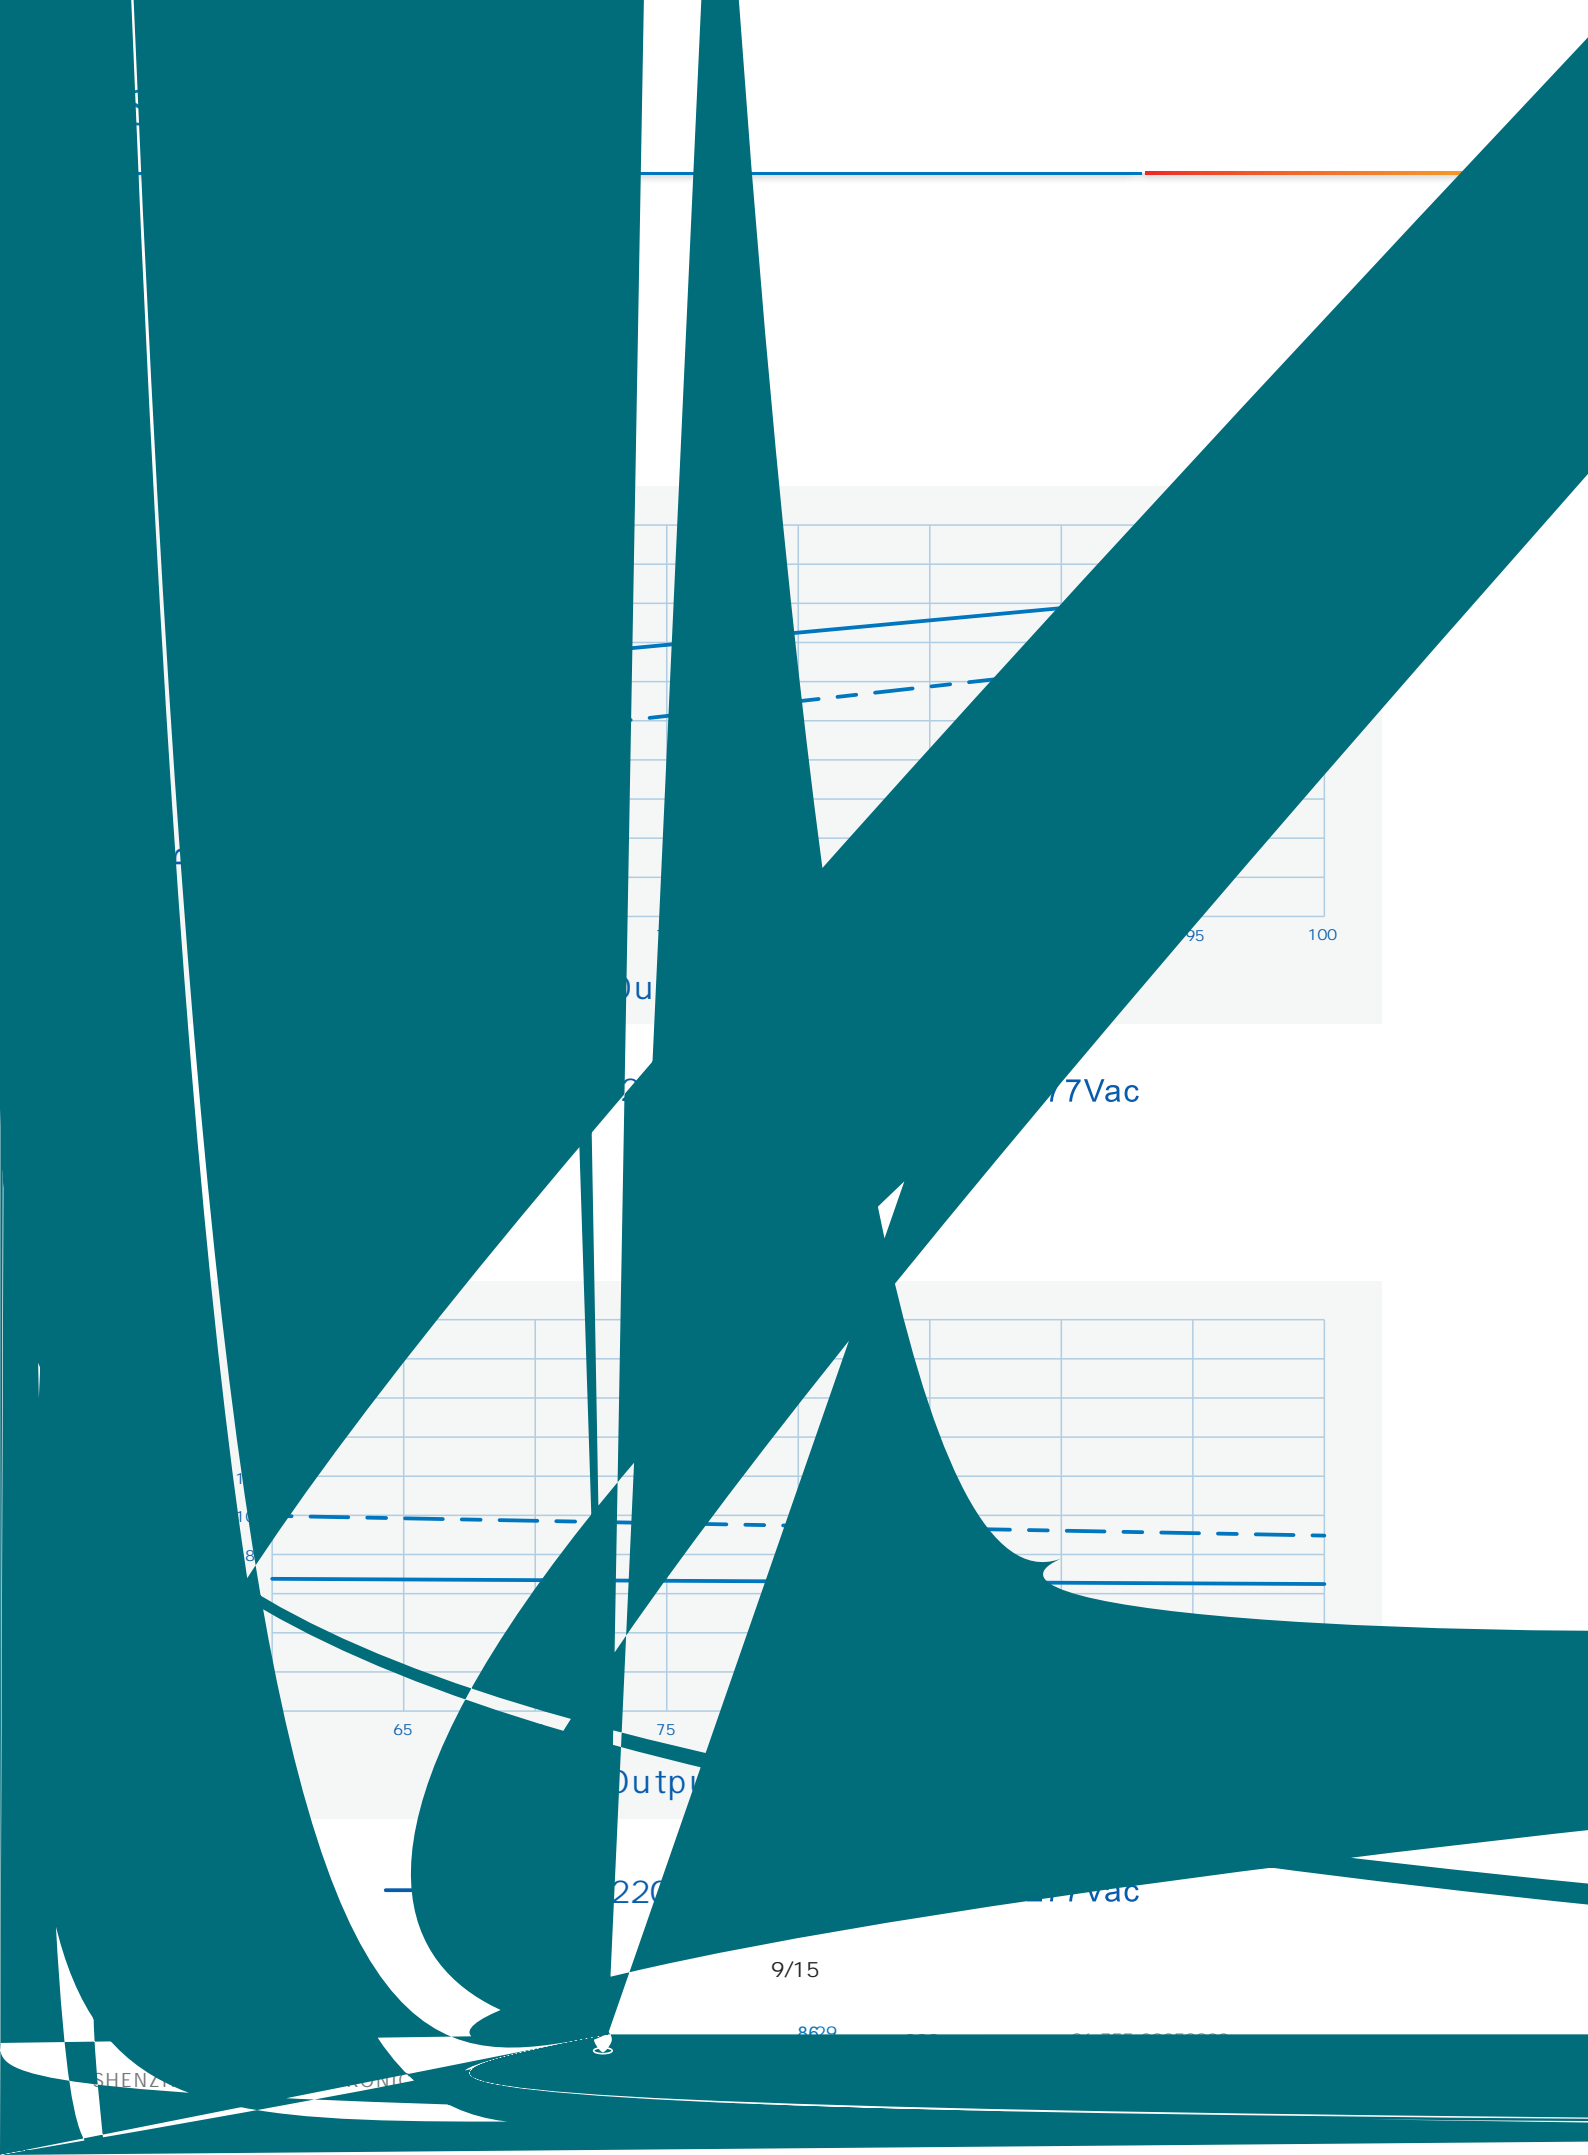

Output

17Vac



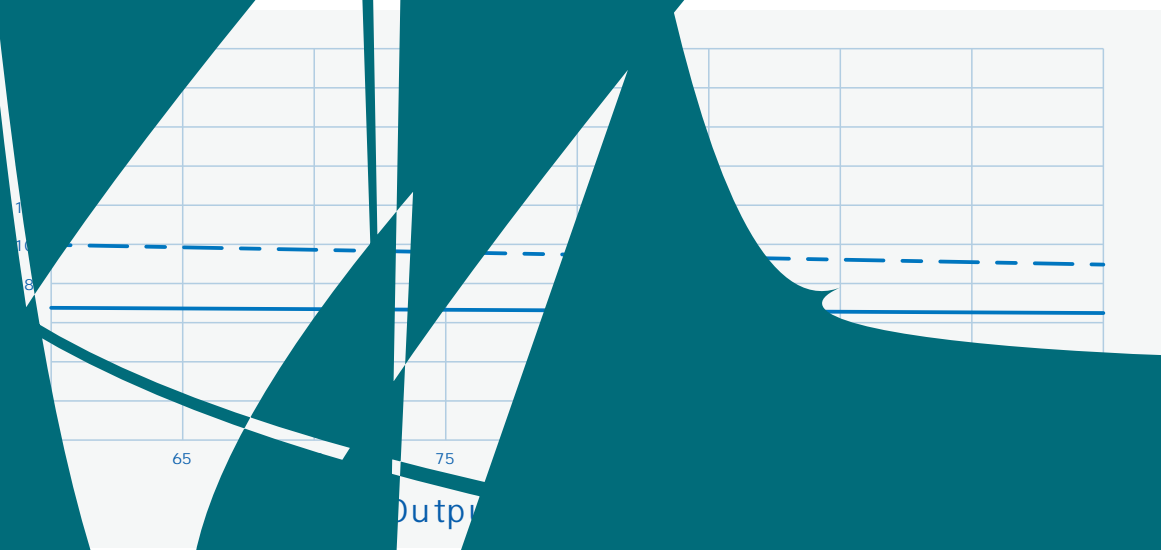


Output

220

17Vac

SS-730VP-G系列LED

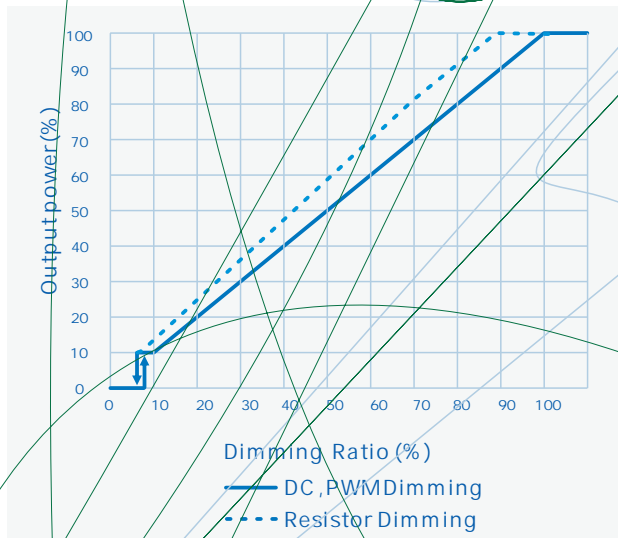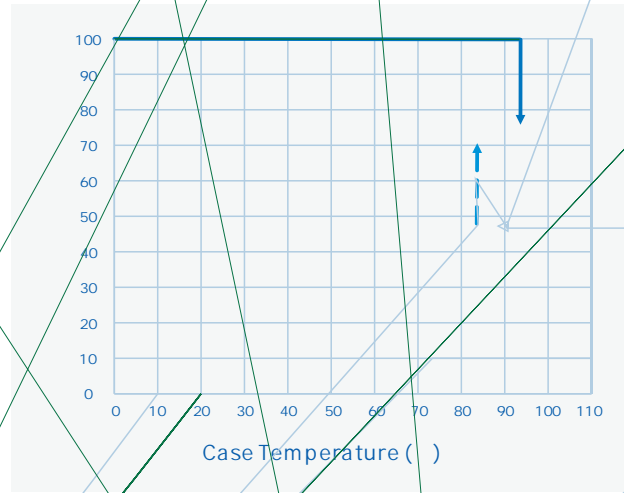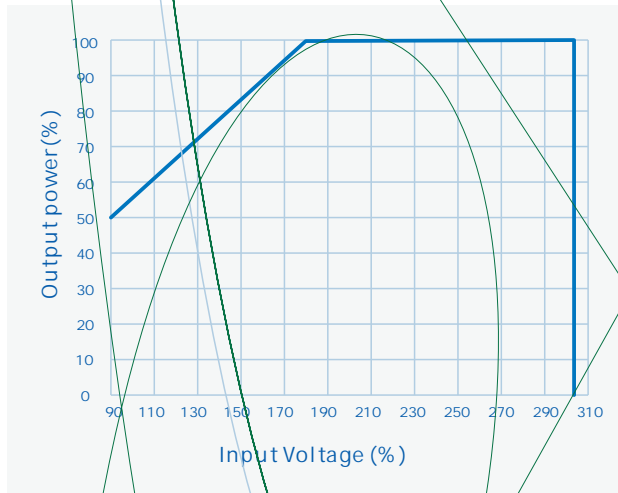

Vs.

SS-730VP-G系列LED

- 1
- 2
- 3 PC



LED


LED

SS-730VP-G系列LED




	(0-10V)	10V()	
	(10-0V)	0V()	
	(0-10V)	0V()	(
			(

" 10V()" / " 0V "

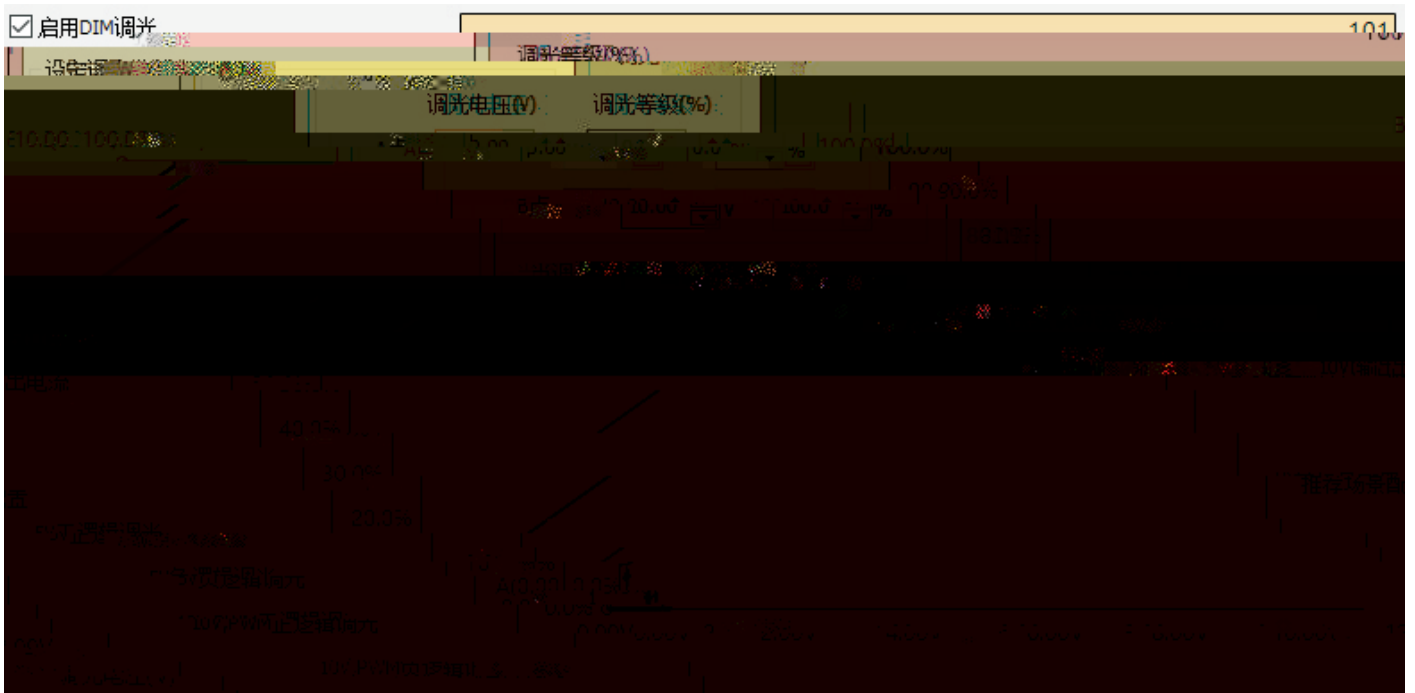

SS-730VF

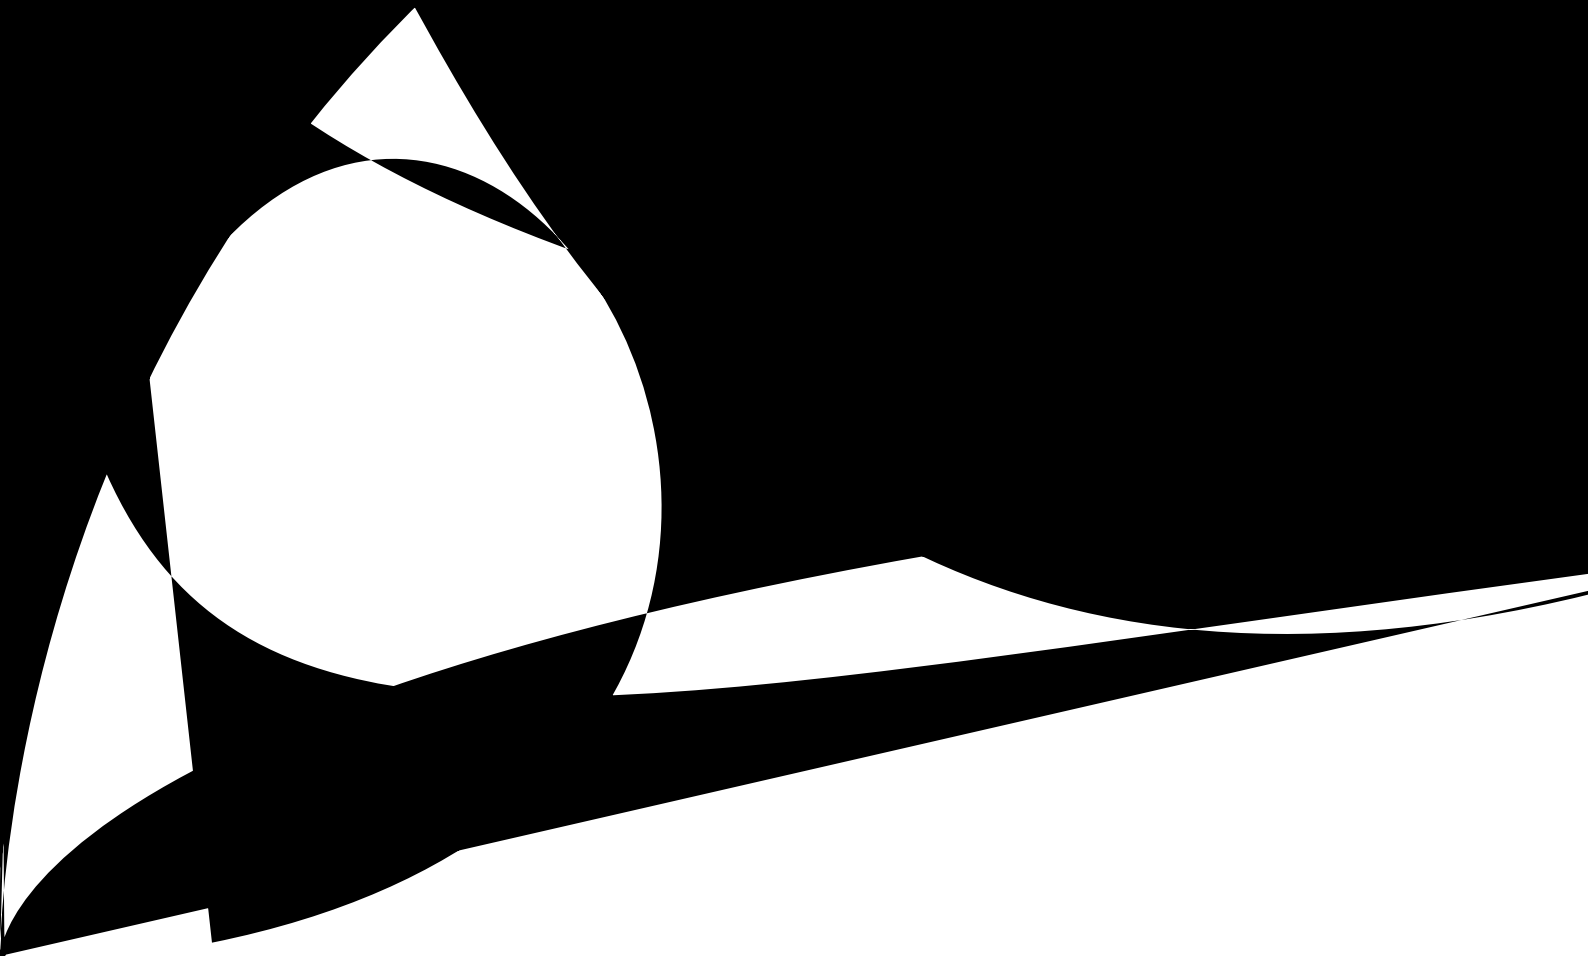

SS-730VP-G系列LED



1

- mm × × =495× 385× 162;
- 5
- 2.5kg 13.5kg
-

GB 3873 83

1

RoHS

RoHS (2011/65/EU) 2015/863/EU

SS-730VP-G系列LED



V00		2024/11/20	

