

SOSEN LED Driver, Your Smart Choice


SS-320VH LED

: SS-320VH-XXX

: 320W LED

: V01

: 2021-11-02

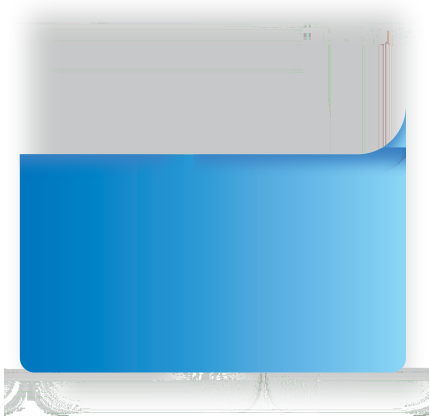

	100Vac		277Vac	
	90Vac		305Vac	
	47Hz		63Hz	
			3.8A	100Vac

	(120Vac)		120A	
	(220Vac)		180A	冷机启动
	(277Vac)		200A	冷机启动
			5W	220Vac/50Hz, 空载
	0.97	0.98		220Vac/50Hz, 满载
	0.90			100-277Vac/50Hz, 70-100%载
		8%	10%	220Vac/50Hz, 满载
			20%	100-277Vac/50Hz, 70-100%载




SS-320VH LED

0-10V		0V		12V	DIM+ 100-150uA
		10%Iomax		100%Ioset	DIM+/DIM-
		0V		10V	
10-0V		0V		10V	DIM+ 40uA
PWM	PWM	9.8V		10.2V	DIM+ 100-150uA
	PWM	0V		0.3V	DIM+/DIM-
	PWM	1KHz		2KHz	
	PWM	0%		100%	
0-10V		0.7V	0.8V	0.9V	42V,
		0.8V	0.9V	1.0V	
10-0V		9.1V	9.3V	9.5V	
		9.0V	9.2V	9.4V	
	73	62,000 hours		80%	
	MTBF	215,000 hours		220Vac, 25 (MIL-HDBK-217F)	
		IP67			
		90			
		5		73	
		1580g			
		222mm*89.5mm*44.5mm		x x	

25 LED






SS-320VH LED



	UL	ENEC	CCC	
	1600Vac	3000Vac	3750Vac	
	1600Vac	1500Vac	1875Vac	
	1600Vac	3000Vac	3750Vac	
	1600Vac	1000Vac	1000Vac	
	500Vac	1000Vac	1000Vac	
	500Vac	250Vac	500Vac	
	10MΩ		500Vdc	
	0.1Ω		25A/1min	
	0.75mA		277Vac	

1. EMC
2. LN
3. CCC IEC 60598-1:2014 10.2 " "

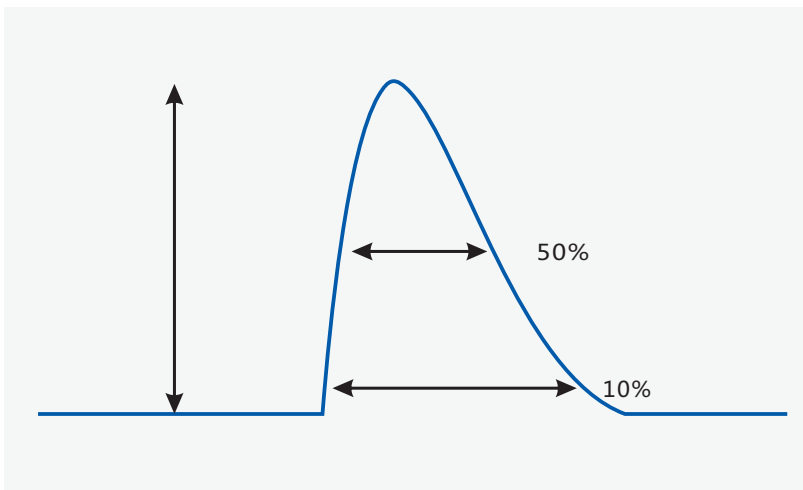


		T(@ 10%)	T(@ 50%)
120Vac	120A	750uS	
220Vac	180A		300uS
277Vac	200A	550uS	




SS-320VH LED

6


V₃ 1 nrv (/AOC) V V

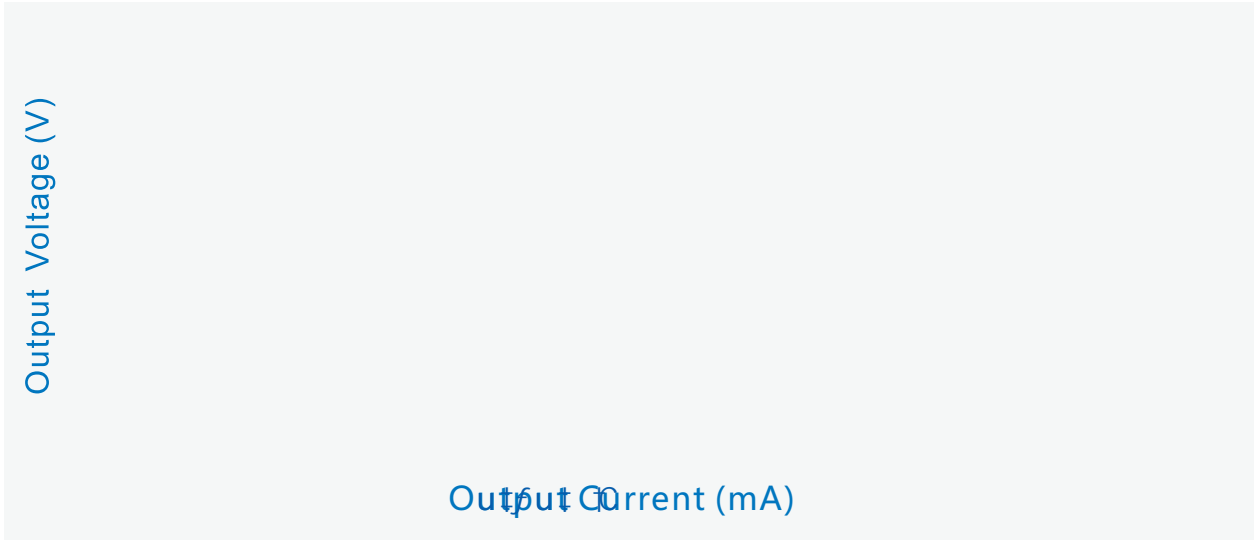

----- Dimming Window ————— AOC Window




Vs. (Vin=220Vac)

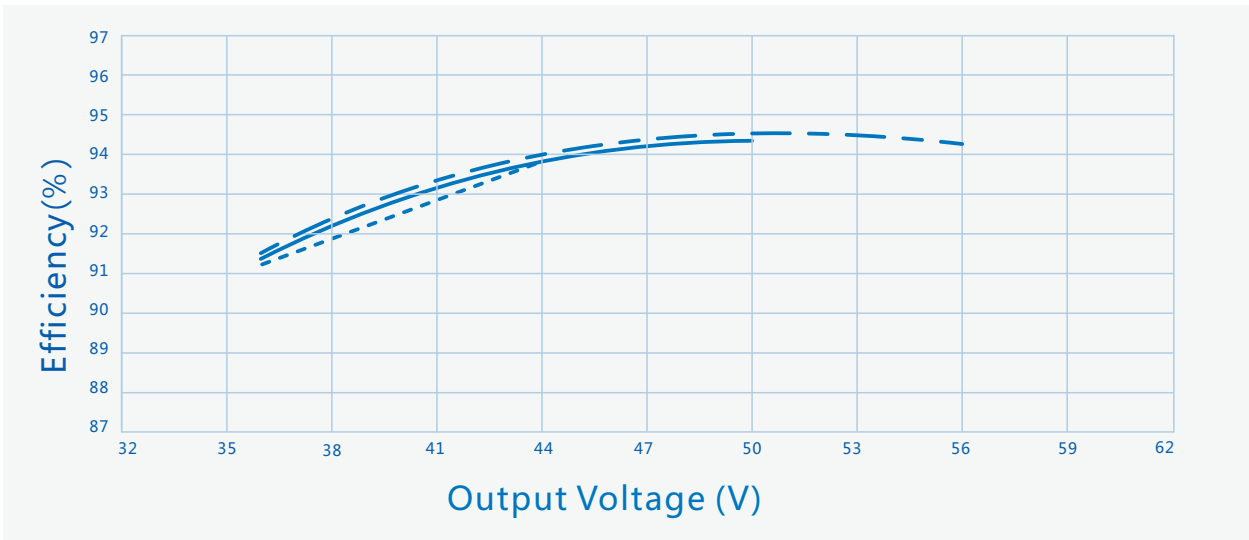

----- Io=7250mA ————— Io=6400mA - - - - Io=5700mA

Vs. (Vin=277Vac)

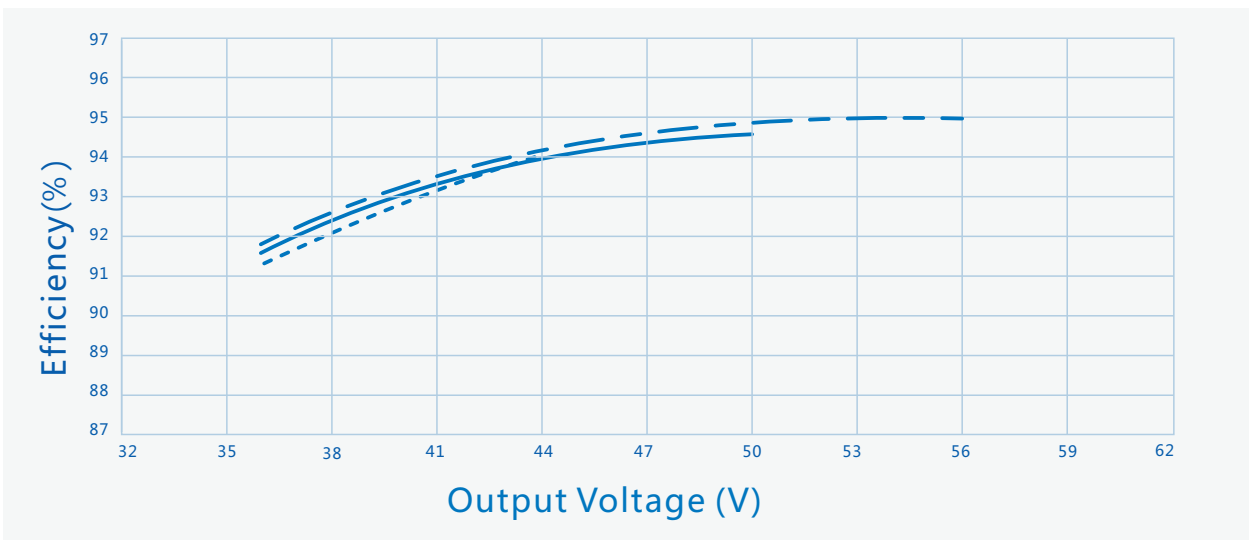

----- Io=7250mA ————— Io=6400mA - - - - Io=5700mA




Vs.

Vs.





- 1
- 2
- 3 PC

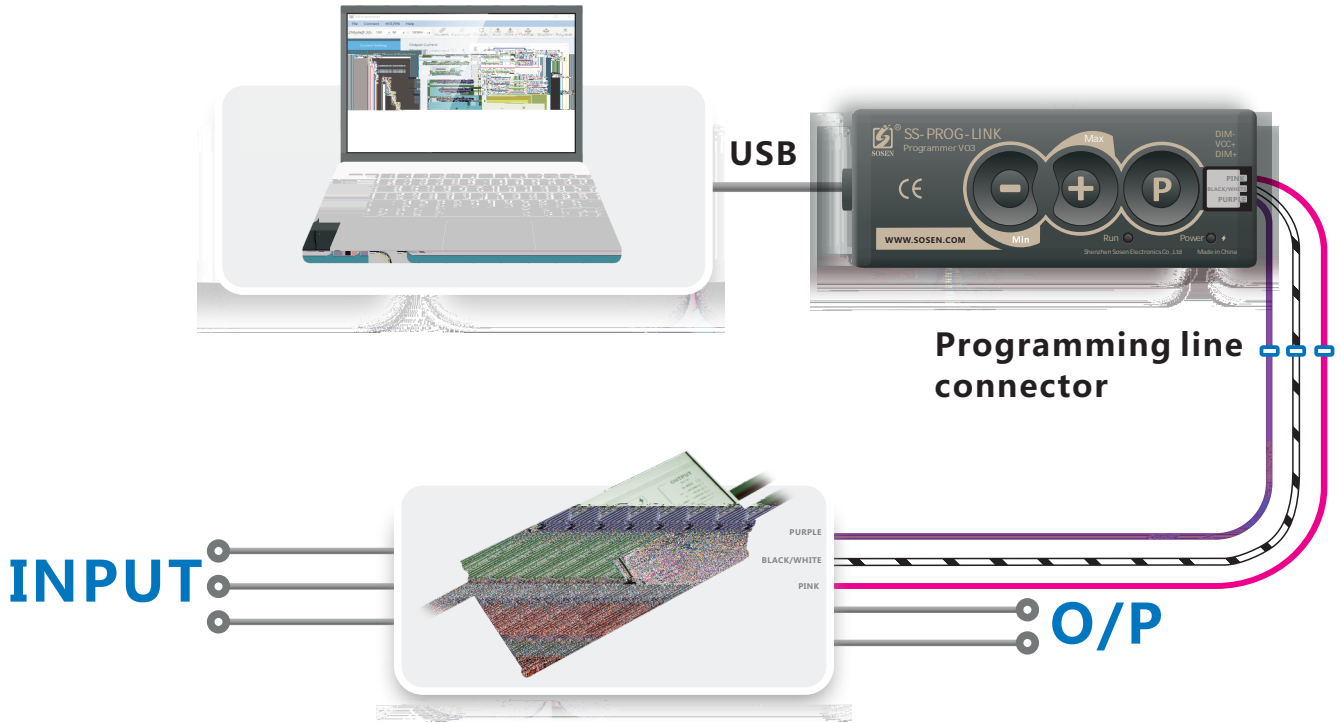

SS-PROG-LINK

SS-320V

LED

“

”



SS-320VH LED



V00		2021/07/08	
V01		2021/11/02	

