

SOSEN LED Driver, Your Smart Choice


SS-75VP LED

: SS-75VP-XX


: 75W LED

: V06

: 2023-02-01

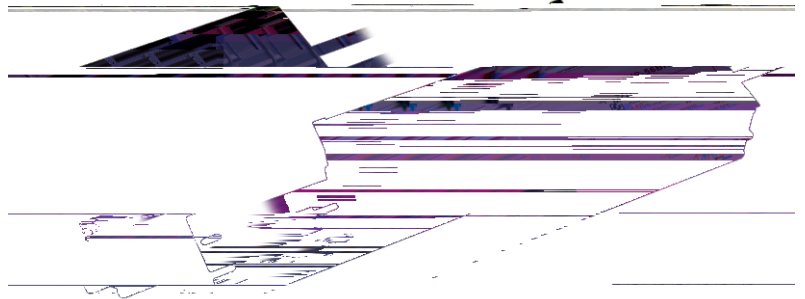

- 90.5%
- DALI-2,0-10V PWM
-
- : 10kV/ 6kV
- 12V/0.2A
-
- LED
- < 0.5W
- IP67
- PC
- Type HL,
- 全方位保护：短路/过温
- 质保8年

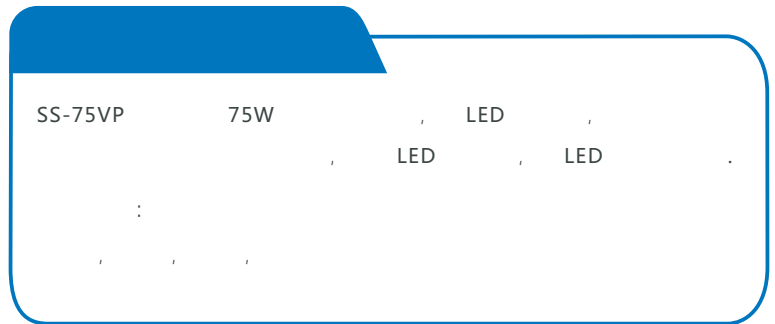

1. 220Vac, 25°C;
2. LED

LED



(SS-75VP-56*)

	22V		56V	22-32V
	32V		56V	$P_o = V_o \cdot I_o = 75W$
	1.34A		2.4A	2.4A 32V, 1.34A 56V
AOC	0.35A		2.4A	
	1.2A		2.4A	DALI-2
			60V	
& 120Vac	85.0%	86.0%		56V/1.34A
& 220Vac	86.5%	87.5%		56V/1.34A
& 277Vac	87.0%	88.0%		56V/1.34A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			0.5S	120Vac
			0.5S	220Vac
			0.7S	230Vac DALI-2
	-2%		+2%	
	-2%		+2%	
	-0.03%/		+0.03%/	0 90
	90	100	110	> Tc Typ., < Tc Min.,
			10W	
			0.5W	DALI-2

(SS-75VP-108*)

	54V		108V	54-72V
	72V		108V	$P_o = V_o \cdot I_o = 75W$
	0.7A		1.05A	1.05A 72V, 0.7A 108V
AOC	0.1A		1.05A	
	0.525A		1.05A	DALI-2
& 120Vac	87.0%	88.0%		108V/0.7A
& 220Vac	89.0%	90.0%		108V/0.7A
& 277Vac	89.0%	90.0%		108V/0.7A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			0.5S	120Vac
			0.5S	220Vac
			0.7S	230Vac DALI-2
	-2%		+2%	
	-2%		+2%	
	-0.03%/		+0.03%/	0 90
	90	100	110	> Tc Typ., < Tc Min.,
			10W	
			0.5W	DALI-2



“SOS”






Vs.


/AOC

Vs.

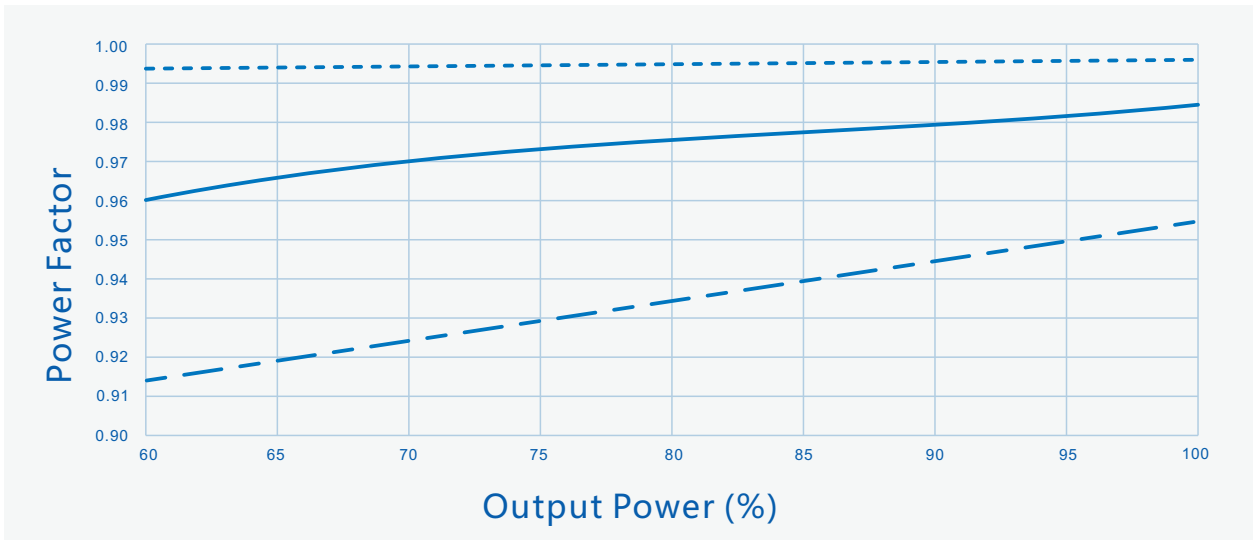

----- Vin=120Vac ————— Vin=220Vac - - - - Vin=277Vac

Vs.

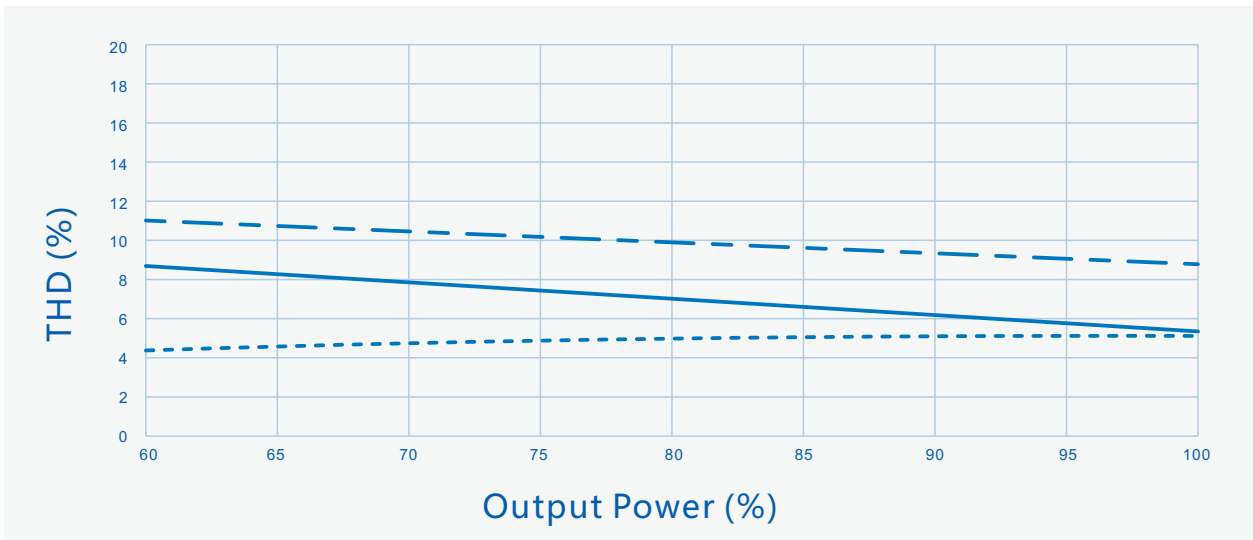


----- Vin=120Vac ————— Vin=220Vac - - - - Vin=277Vac






Vs.



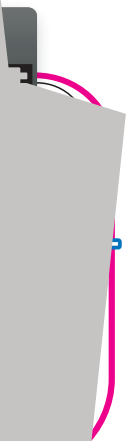

		mm(In.)
	L3	154(6.06)
	W1	66(2.6)
	H	35.5(1.4)
	L1	179(7.05)
	L2	164(6.46)
	W2	32(1.26)
Tc	X	57(2.24)
Tc	Y	33.7(1.33)

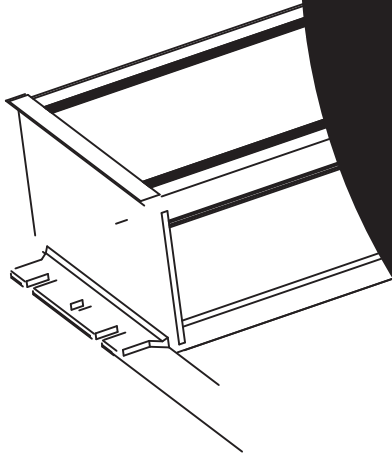



1

- mm) : × × = 495×385×162;
- 14
- 0.72kg 11kg
-
- 。

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。

RoHS

RoHS (2011/65/EU)

2015/863/EU





V00		2019/07/26	

