

# SOSEN LED Driver, Your Smart Choice


## SS-730VP LED


: SS-730VP-XX

: 730W LED

: V05

: 2023-03-01

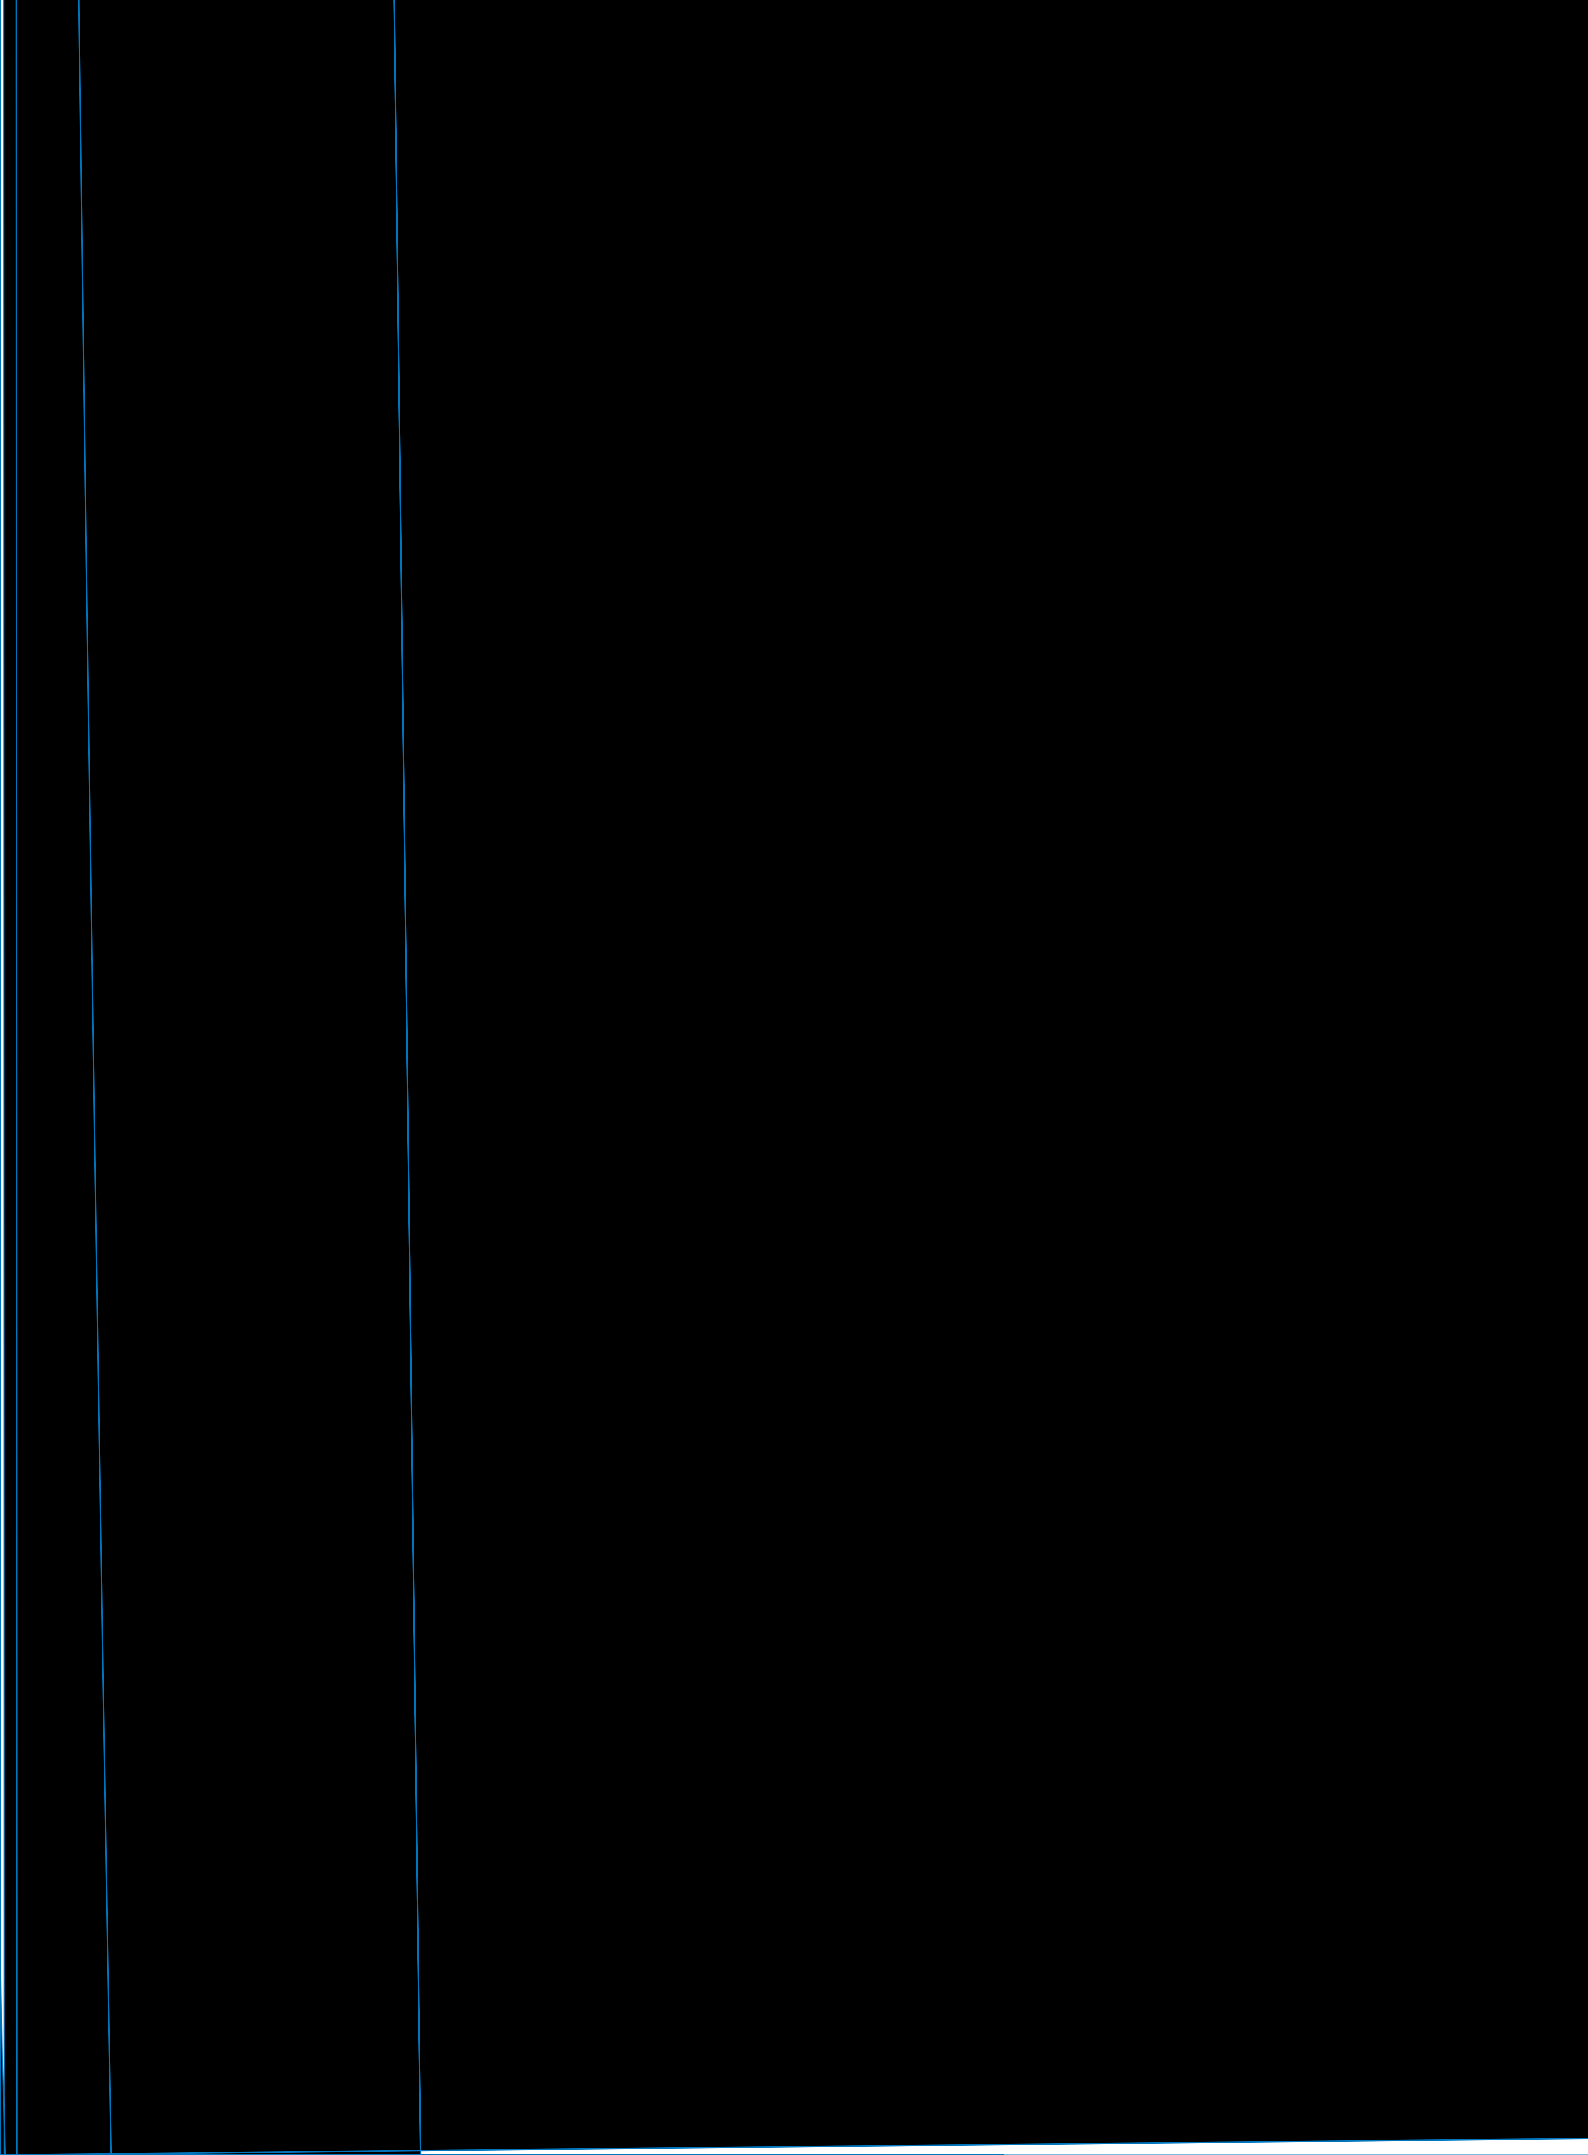



# (SS-730VP-56\*)









		11.4V	12V	12.6V	6W
		0mA	300mA	400mA	
0-10V		0V		12V	
		10%Ioset		100%Ioset	DIM+ 110uA
		0V		10V	DIM+ /DIM-
PWM	PWM	9.8V		10.2V	
	PWM	0V		0.3V	DIM+ 110uA
	PWM	1KHz		2KHz	DIM+ /DIM-
	PWM	0%		100%	
		0K		100K	
		10%		100%	DIM+ 110uA
		7%	8%	9%	PWM,
		8%	9%	10%	PWM,
	71	71,000 hours			80%
	MTBF	198,200 hours			220Vac, 25 (MIL-HDBK-217F)
		IP67			
		90			
		8			71
		3300g			
		430mm*89.5mm*44.5mm			x x

1, 25 LED N,  
 2, 0-100% , :91K /N.




Tcase	-30	25	+90	
	-30	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

UL/cUL	UL8750	✓	
ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017	✓	
RCM	AS/NZS61347.2.13		
BIS	IS15885:2012 Part 2 Sec 13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN 61347-1:2008+ A1:2011+ A2:2013		

EMI/EMS		
	/	
	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B
	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B
	IEC/EN 61000-3-2	Class C
	IEC/EN 61000-4-5	B ( 模10kV , 模6kV )
	IEC/EN 61000-4-12	B ( 6kV 6kV )




Vs. /AOC

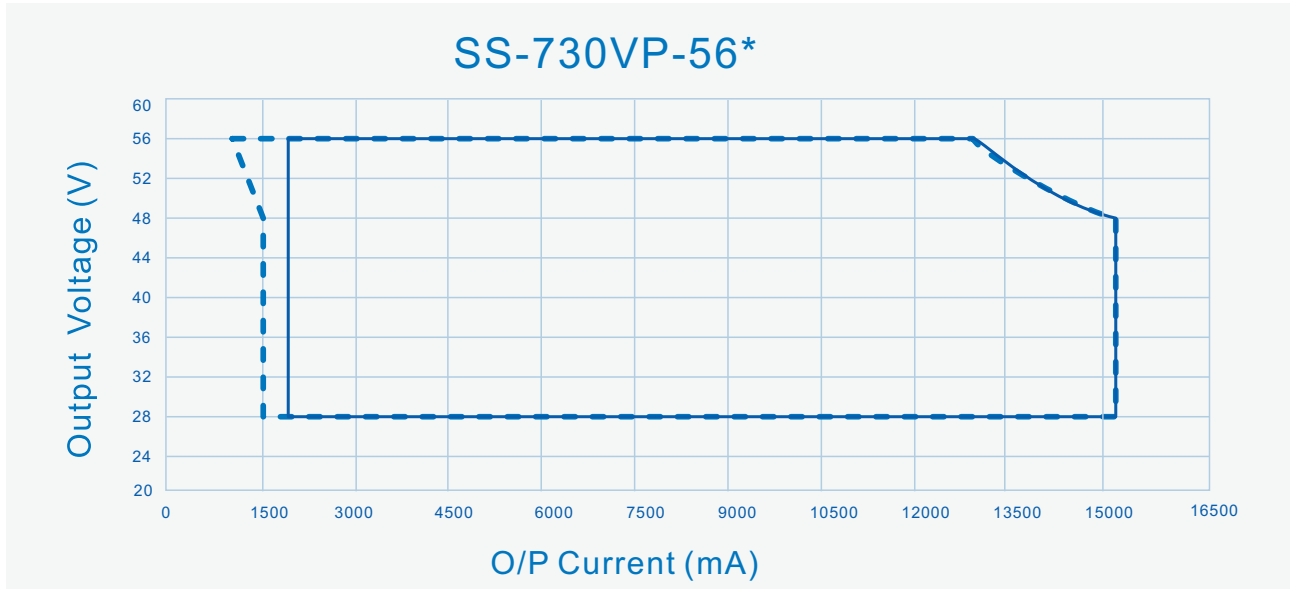

-- DIM Window

— AOC Window

Vs. (Vin=120Vac)

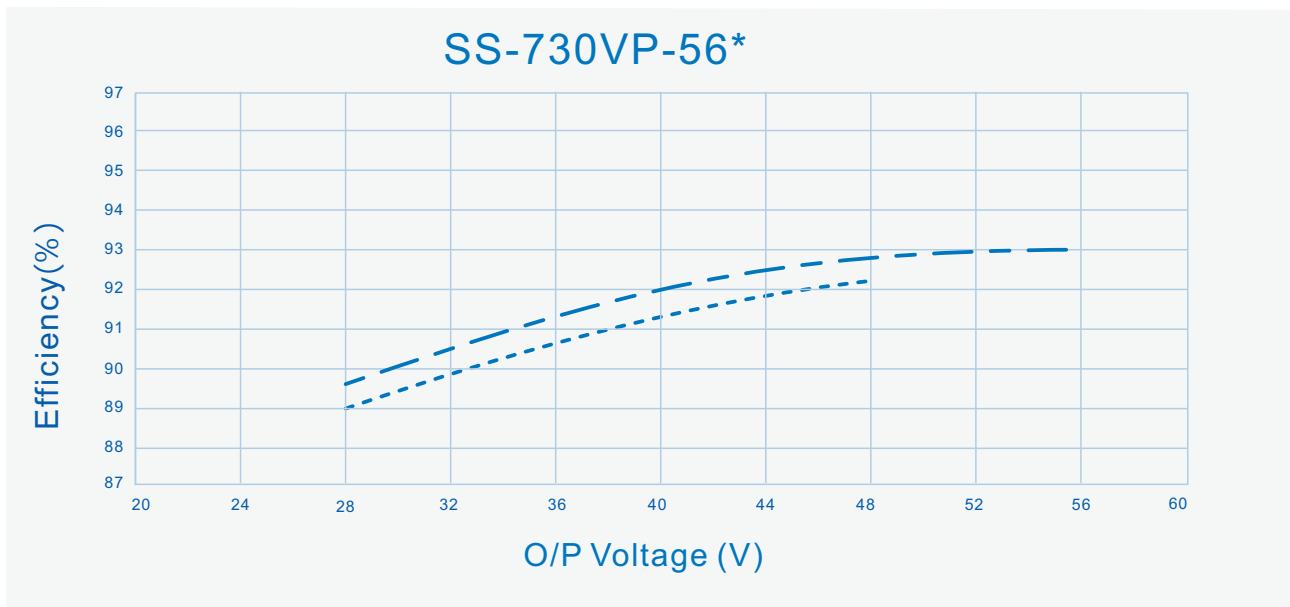


..... Io=15200mA


- - - Io=13040mA



Vs. (Vin=220Vac)

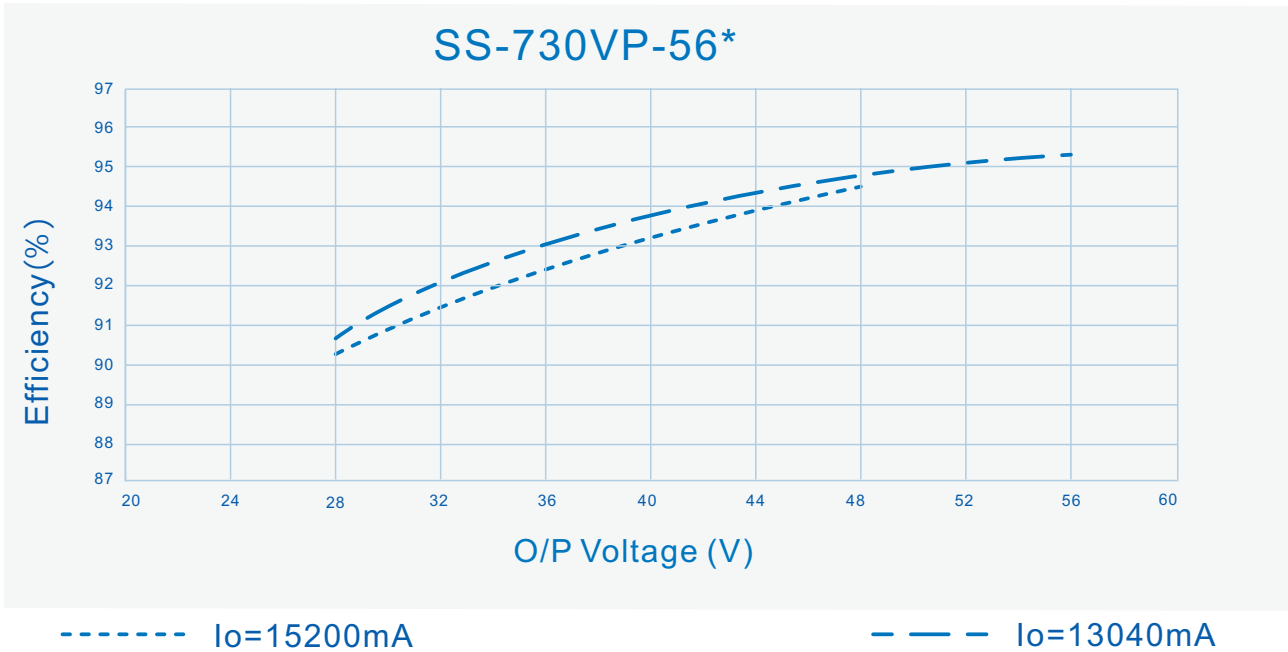


Vs. (Vin=277Vac)

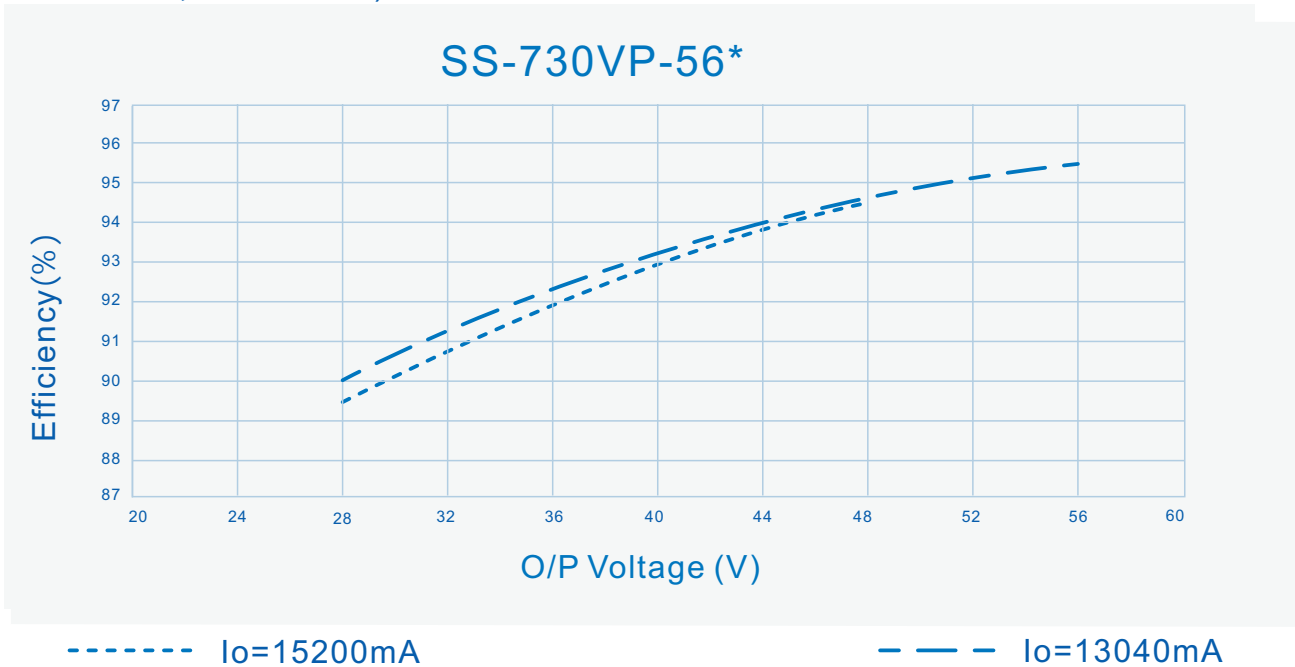





Vs.

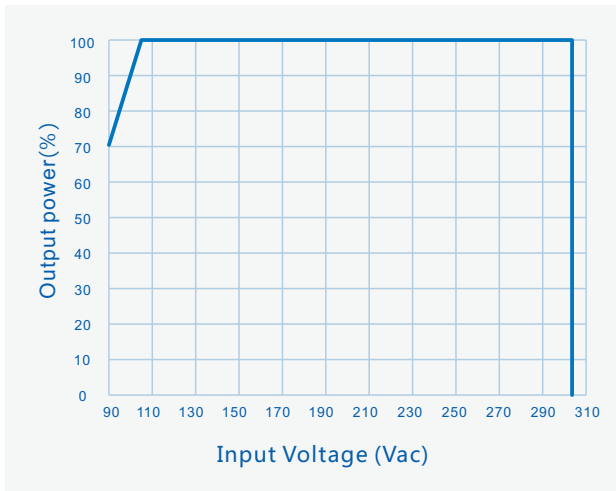


Vs.

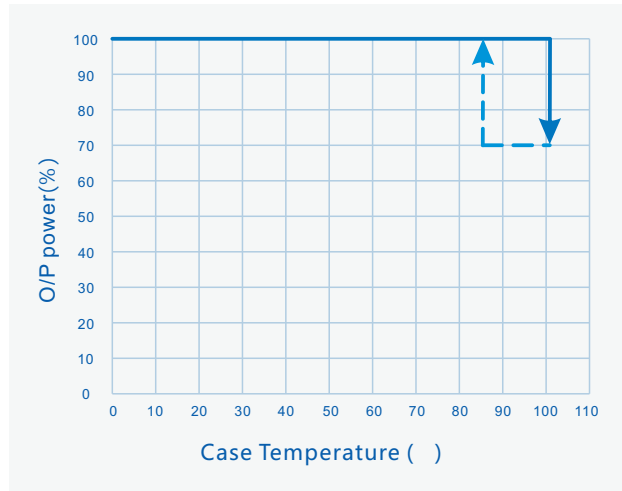

Vs.

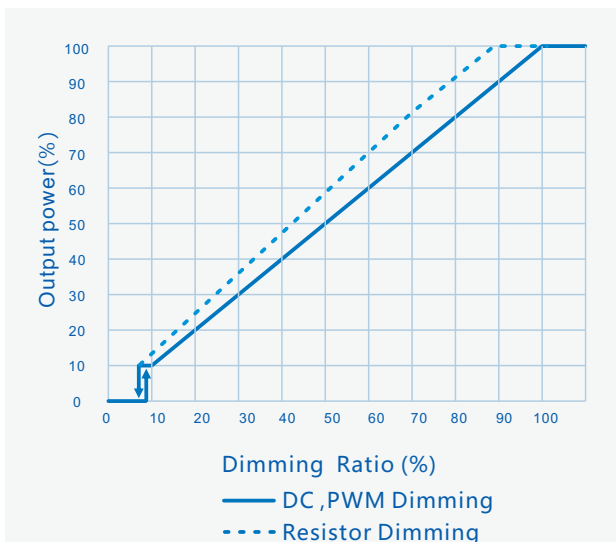

Vs.

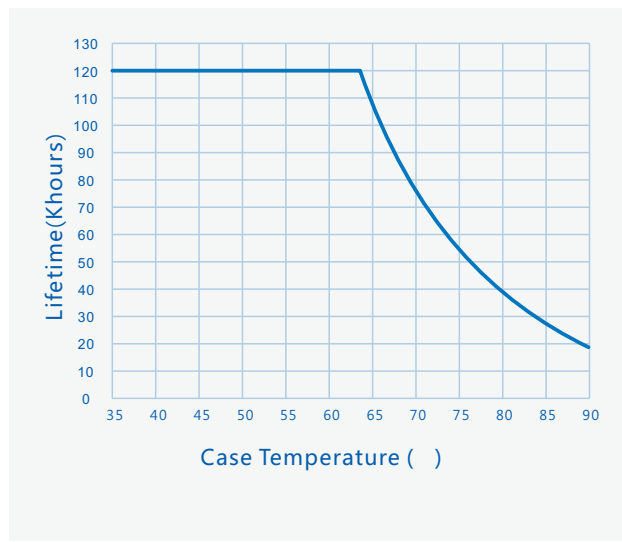



**AC** ( **450±10mm**)

SJOW 3\*17AWG 8.0mm L N  
 SJTW 3\*16AWG 8.5mm L N

**DIM** / R q . ò

		mm(In.)
	L1	430(16.93)
	L2	416.5(16.4)
	L3	403.2(15.87)
0	H	44.5(1.75)

1 LED ;  
 2 AC DC DIM /  
 43±5mm 10±2mm;

		mm(In.)
	W1	89.5(3.52)
	W2	40(1.57)
Tc	X	133(5.24)
Tc	Y	15(0.59)





适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。



V00		2020/12/03	

